

# TEKNIC



Control and Signaling Devices Ø 22.5 Metal Series





## Control and signalling devices Ø 22.5

### Salient features

This range of Ø 22.5 pushbuttons, selector switches, illuminated switches, illuminated selector switches and pilot lights have been designed to provide the following salient features:

- Economy of space
- Aesthetically elegant
- SELF WIPING CONTACT
- Robust in materials of construction
- Simple to fix - screw driver is all that required
- Safe in operation
- Fixing method unaffected by excessive vibration-unit does not rotate
- Very good flame resistance
- Protection against electric shock (unit earthed)
- Shrouded terminals

### Actuators

The circular actuators have chrome plated metal bezels, and are interchangeable on the different types of contact elements.

### Contact elements

The contact elements are double break and have self wiping contacts. The elements are interchangeable and can be stacked without additional hardware. 1 to 6 elements (NO or NC) can be used with non illuminated actuators, whereas, 1 to 4 elements (NO or NC) can be used for illuminated actuators. **Gold plated NO and NC contact elements for low voltage, low current switching circuits < 25 mA, are available.**



### Illuminated pushbuttons and pilot lights

Pilot lights and illuminated switches are suitable for direct connection, through series resistor, through series resistor and diode, using bayonet cap filament bulb type BA9S, as follow :

Supply voltage for direct connection without series resistor ..... : 6V-130V

Supply voltage through series resistor ..... : 12V-415V

Supply voltage through series resistor and diode ..... : 230V AC

Bulb ..... : Filament, type BA9S with OAL max., 28 mm

LED illuminated actuators & pilot lights are available with integral LED, LED in bayonet cap suitable for operating at various voltages namely 6V, 12V, 24V, 30V, 48V, 110V, 230V, AC or DC and 415V AC. LED bulbs with bayonet cap are constructed in the standard BA9S design with OAL max. 28 mm. On request an extra short circuit protection consisting of built in fuse in the LED modules can be provided.

Pilot lights are available with built in transformers suitable for operating at 230, 110 volts AC input and 6V, 12V and 24V output.


### Terminals

Contact elements and pilot lights are designed to have shrouded terminals with combi screws.

### Fixing

The control devices Ø 22.5 can be fixed in any position on panels of 1 to 6 mm thickness. We recommend minimum fixing centers of 30 mm X 40 mm. However, the dimensions and configuration should be decided on the basis of the application. The actuators and the lense assemblies lock on to the holding bracket using a bayonet type of fixing which enables a simple and fast assembly. The complete assembly is locked into position on the panel by two M4 pointed screws on the bracket, tightened equally from the rear. The screws should be tightened adequately to such an extent as to pierce through the paint on the panel from inside. These screws also ensure the earthing of the unit.

### Fixing arrangement

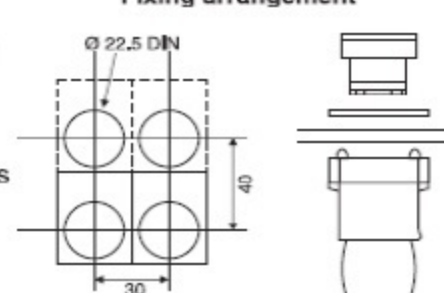

### Electrical and mechanical characteristics

#### Environment

Standard conformity

: CSA - C22.2 No. 14-95, UL508, IEC 947 - 5 (1) 1990, IS 13947

Approvals

: ASTA UK certified as per IEC 947 - 5 - (1) 1990

Degree of protection

: CSA - C22.2 No. 14-95, UL508

Ambient

: IP 65 as per IEC 529, NEMA 4X, 12 as per UL 50

Operating position

: - 25°C to + 70°C

: All positions

#### Contact Block

Rated insulation voltage

: 500 V

Rated thermal current

: 10 A

Contact operation

: Self wiping, slow break NO or NC

Make and break capacity

As per IEC 947 - 5 - (1) 1990

: AC 15 4 A, 415V AC

: DC 13 0.5 A, 110V DC

: A 600 Q600

: minimum 1 x 0.5 mm<sup>2</sup>, maximum 2 x 1.5 mm<sup>2</sup> or 1 x 2.5 mm<sup>2</sup>

: 1-2 for NC, 3-4 for NO

: 10 A cartridge fuse HRC type, rated for resistive loading

: Over 1 million operations

Mechanical life

Electric rating

(for 1 million operation cycles, operation at 3600 cycles per hour, load factor 0.5)

AC 15	V				DC 13	V		
	24	120	230			24	110	
A	5	4	3		A	0.5	0.2	

### Modules for pilot light & illuminated switches with integral LED / multichip LED bulb (BA9S cap)

Current consumptions (applicable to all colours)

24 VAC/DC, 110 VAC & 240 VAC

: max. 20 mA

110 VDC

: max. 15 mA

220 VDC

: max. 10 mA

Service life (at nominal voltage and at ambient temperature of 25°C)

: 50,000 hours

Voltage limits (nominal voltage)

: < 20% of rated voltage >

Short circuit protection

: on specific request


Terminal capacity

: min. 1 x 0.5 mm<sup>2</sup>, max. 2 x 1.5 mm<sup>2</sup> or 1 x 2.5 mm<sup>2</sup>

## Control and signalling devices Ø 22.5

### Ordering instructions

1. Actuators, illuminated actuators, contact elements, lense assemblies & pilot lights can all be ordered separately or in combination.
2. The type numbers of contact elements are : NO: Actuator mounting : S1, S3 Note: S3, S4, S7, S8 are gold plated contacts suitable for low voltage, low current switching circuits < 25 mA  
Individual mounting : S5, S7  
NC: Actuator mounting : S2, S4  
Individual mounting : S6, S8
3. Some examples of type numbers:  
Actuator : Type 2AF3 is flush actuator, GREEN  
Pilot light : Type 2PLB4 is pilot light without series resistor, RED  
Complete pushbutton : Type 2PSF411 is flush pushbutton, RED, with 1NO+1NC contact elements



### Accessories and spares

#### Legend plates

Legend plates 30 x 40 mm are supplied with the following standard texts:


START FORWARD UP OPEN AUTO SLOW RESET ON RIGHT TRIP  
STOP REVERSE DOWN CLOSE HAND FAST INCH OFF LEFT POWER ON  
Legend plate Ø 60 mm yellow with black characters for **EMERGENCY STOP**



#### Filament bulb

Filament bulb type BA9S, OAL 28mm

Voltage	: 6	12	24	30	48	60	130
Watts	: 1	2	2	2	2	2	2,6



#### LED bulb

LED multichip bulb type BA9S, OAL 28mm

Colour	: White	Green	Red	Amber	Blue	Yellow	V	W
Type No.	: MCB9124	MCB9324	MCB9424	MCB9524	MCB9624	MCB9824	24	0.5
	MCB91110	MCB93110	MCB94110	MCB95110	MCB96110	MCB98110	110	1.0
	MCB91230	MCB93230	MCB94230	MCB95230	MCB96230	MCB98230	230	1.0



#### Lenses


Colour of lense : Translucent White Green Red Amber Blue Clear Yellow

For pilot lights with filament bulb 2PLL1 2PLL3 2PLL4 2PLL5 2PLL6 2PLL7 2PLL8

For illuminated actuators with filament bulb (flush/projecting) 2LAL1 2LAL3 2LAL4 2LAL5 2LAL6 2LAL7 2LAL8

For pilot lights with LED 2PLL1L 2PLL3L 2PLL4L 2PLL5L 2PLL6L 2PLL7L 2PLL8L

For illuminated actuators with LED (flush/projecting) 2LAL1L 2LAL3L 2LAL4L 2LAL5L 2LAL6L 2LAL7L 2LAL8L




#### Push Push mechanism for converting spring return actuator into stay put type

Type No.: 2PPM




#### Adaptor for fixing Ø 22.5 devices in Ø 30.5 cutout.

Type No. : 2ADP



#### Fixing flange


Type No. : 2BRK



#### Padlock

For mushroom actuator : type no. 2PAM

For projecting actuator : type no. 2PAP



#### Boots for booted actuators

Colour of Boot : Black Green Red Blue Yellow  
Type No : 2BT2 2BT3 2BT4 2BT6 2BT8



#### Boot for non ill. flush actuator

Colour of Boot : Clear  
Type No : 2BT7



#### Boot for flush / proj. ill actuator

Colour of Boot : Clear  
Type No : 2ALBT7



#### Boot for twin actuator

Colour of Boot : Clear  
Type No : 2ATBT7




#### Boot for twin ill. actuator

Colour of Boot : Clear  
Type No : 2ATLBT7




#### Bulb extractor

Type No. : 2BA9SE



#### Blanking plug for Ø 22.5 hole, black







Type No. : 2BP2



# TEKNIC

Control & Signalling Devices 22.5 Ø

## METALLIC SERIES






MOMENTARY ACTUATORS			
	TYPE	COLOUR	ORDERING CODE
			
	<b>Flush</b>	White	2AF1
		Black	2AF2
		Green	2AF3
		Red	2AF4
		Blue	2AF6
		Yellow	2AF8
			
	<b>Flush with arrow marking</b>	White	2AF1A
		Black	2AF2A
		Green	2AF3A
		Red	2AF4A
		Blue	2AF6A
		Yellow	2AF8A
			
	<b>Projecting</b>	White	2AP1
		Black	2AP2
		Green	2AP3
		Red	2AP4
		Blue	2AP6
		Yellow	2AP8
			
	<b>Flush Relay Reset</b>	White	2AF1RR
		Black	2AF2RR
		Green	2AF3RR
		Red	2AF4RR
		Blue	2AF6RR
		Yellow	2AF8RR
			
	<b>Recess head</b>	White	2AF1RH
		Black	2AF2RH
		Green	2AF3RH
		Red	2AF4RH
		Blue	2AF6RH
		Yellow	2AF8RH
			
	<b>Booted</b>	Black	2AB2
		Green	2AB3
		Red	2AB4
		Blue	2AB6
		Yellow	2AB8

# TEKNIC

Control & Signalling Devices 22.5 Ø

## METALLIC SERIES






### MUSHROOM ACTUATORS

	TYPE	COLOUR	ORDERING CODE
			
		Black	2AM2
	<b>Momentary Ø 40mm</b>	Green	2AM3
		Red	2AM4
		Blue	2AM6
		Yellow	2AM8
			
	<b>Latching Ø 30mm</b>	Black	2AMLS2
		Red	2AMLS4
			
	<b>Latching Ø 40mm</b>	Black	2AML2
		Red	2AML4
			
	<b>Push-Pull Ø 40mm</b>	Black	2AMPP2
		Red	2AMPP4
			
	<b>Latching with Key Ø 40mm</b>	Black	2AMLKB2
		Red	2AMLKB4

# TEKNIC

Control & Signalling Devices 22.5 Ø

## METALLIC SERIES









MUSHROOM ACTUATORS			
	TYPE	COLOUR	ORDERING CODE
			
	<b>Latching Trigger</b>	Black	2AMLT2
	<b>Ø 40mm</b>	Red	2AMLT4
			
	<b>Latching Trigger with key</b>	Black	2AMLTKB2
	<b>Ø 40mm</b>	Red	2AMLTKB4
			
	<b>Latching</b>	Black	2AMLJ2
	<b>Ø 60mm</b>	Red	2AMLJ4
			
	<b>Push-Pull</b>	Black	2AMPPJ2
	<b>Ø 60mm</b>	Red	2AMPPJ4
			
		Black	2AMJ2
	<b>Momentary</b>	Green	2AMJ3
	<b>Ø 60mm</b>	Red	2AMJ4
		Blue	2AMJ6
		Yellow	2AMJ8



# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

## SELECTOR ACTUATORS

	TYPE		COLOUR	ORDERING CODE
	SELECTOR			
	2 position LATCHING		Black	2AS2-2P
	With ext. knob			2AS2E-2P
	2 position MOMENTARY		Black	2AS2-2PSR
	With ext. knob			2AS2E-2PSR
	3 position STAY PUT		Black	2AS2-3P
	With ext. knob			2AS2E-3P
	3 position MOMENTARY on both sides		Black	2AS2-3PSR
	With ext. knob			2AS2E-3PSR
	3 position MOMENTARY on right		Black	2AS2-3PSRR
	With ext. knob			2AS2E-3PSRR
	3 position MOMENTARY on left		Black	2AS2-3PSRL
	With ext. knob			2AS2E-3PSRL

# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

## KEY SELECTOR





TYPE		COLOUR	ORDERING CODE
<b>2 POSITION</b>			
<b>Stayput</b>		Black	2AK2-2PB
			2AK2-2PO
			2AK2-2PI
<b>Spring Return</b>		Black	2AK2-2POSR
<b>3 POSITION</b>			
<b>Stayput</b>		Black	2AK2-3PA
			2AK2-3PB
			2AK2-3PC
<b>Spring Return</b>		Black	2AK2-3PSR
<b>Spring Return</b>			
<b>right to centre</b>		Black	2AK2-3PSRR
<b>Spring Return</b>			
<b>left to centre</b>		Black	2AK2-3PSRL
* X stands for position in which key is removable			







# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

TWIN ACTUATORS			
	TYPE	COLOUR	ORDERING CODE
 			
		Green	2ATF3F4
	Double Flush	Red	
	w/o IO Mark	Yellow	2ATF8F2
		Black	
		Green	2ATF3F4(IO)
	Double Flush	Red	
	with IO Mark	Yellow	2ATF8F2(IO)
		Black	
		Green	2ATF3P4
	1 Flush,	Red	
	1 Projecting	Yellow	2ATF8P2
	w/o IO Mark	Black	
		Green	2ATF3P4(IO)
	1 Flush,	Red	
	1 Projecting	Yellow	2ATF8P2(IO)
	with IO Mark	Black	









# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

ILLUMINATED ACTUATOR WITH BULB			
	TYPE	COLOUR	ORDERING CODE
	Illuminated Flush, Momentary		
		White	2ALF1
	<b>Filament Bulb</b>	Green	2ALF3
	<b>6V to 130V AC/DC</b>	Red	2ALF4
		Amber	2ALF5
		Blue	2ALF6
		Clear	2ALF7
		Yellow	2ALF8
Direct Connection	Please mention the voltage required after the ordering code		
		White	2ALRF1
	<b>Filament Bulb</b>	Green	2ALRF3
	<b>24V, 48V, 110V and 230 VAC/DC</b>	Red	2ALRF4
		Amber	2ALRF5
		Blue	2ALRF6
		Clear	2ALRF7
		Yellow	2ALRF8
Connection with Resistor	Please mention the voltage required after the ordering code		
	Illuminated Projecting, Momentary		
		White	2ALP1
	<b>Filament Bulb</b>	Green	2ALP3
	<b>6V to 130V AC/DC</b>	Red	2ALP4
		Amber	2ALP5
		Blue	2ALP6
		Clear	2ALP7
		Yellow	2ALP8
Direct Connection	Please mention the voltage required after the ordering code		
		White	2ALRP1
	<b>Filament Bulb</b>	Green	2ALRP3
	<b>24V, 48V, 110V and 230 VAC/DC</b>	Red	2ALRP4
		Amber	2ALRP5
		Blue	2ALRP6
		Clear	2ALRP7
		Yellow	2ALRP8
Connection with Resistor	Please mention the voltage required after the ordering code		

# TEKNIC







Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

ILLUMINATED ACTUATOR WITH LED			
	TYPE	COLOUR of LED / LENS	ORDERING CODE
	<b>Illuminated Flush actuator, Momentary</b>		
	Integral LED	White LED / White Lens	2ALRF1L(S)
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ALRF3L
	110VAC, 110VDC,	Red LED / Red Lens	2ALRF4L
	230VAC, 220VDC	Amber LED / Amber Lens	2ALRF5L
		Blue LED / Blue Lens	2ALRF6L
		White LED / Clear Lens	2ALRF7L(S)
		Yellow LED / Yellow Lens	2ALRF8L
	Integral LED	Please mention the voltage required after the ordering code	
	LED Bulb, BA9S type	White LED Bulb / White Lens	2ALF1LB(S)
	24V AC/DC,	Green LED Bulb / Green Lens	2ALF3LB
	110VAC, 110VDC	Red LED Bulb / Red Lens	2ALF4LB
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ALF5LB
		Blue LED Bulb / Blue Lens	2ALF6LB
		White LED Bulb / Clear Lens	2ALF7LB(S)
		Yellow LED Bulb / Yellow Lens	2ALF8LB
	LED Bulb	Please mention the voltage required after the ordering code	
	Integral LED	White LED / White Lens	2ALRF1L(S)F
	24V, 110V, 230V, AC	Green LED / Green Lens	2ALRF3LF
		Red LED / Red Lens	2ALRF4LF
		Amber LED / Amber Lens	2ALRF5LF
		Blue LED / Blue Lens	2ALRF6LF
		White LED / Clear Lens	2ALRF7L(S)F
		Yellow LED / Yellow Lens	2ALRF8LF
	Flasher with Integral LED	Please mention the voltage required after the ordering code	
	<b>Illuminated Projecting Actuator, Momentary</b>		
	Integral LED	White LED / White Lens	2ALRP1L(S)
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ALRP3L
	110VAC, 110VDC,	Red LED / Red Lens	2ALRP4L
	230VAC, 220VDC	Amber LED / Amber Lens	2ALRP5L
		Blue LED / Blue Lens	2ALRP6L
		White LED / Clear Lens	2ALRP7L(S)
		Yellow LED / Yellow Lens	2ALRP8L
	Integral LED	Please mention the voltage required after the ordering code	
	LED Bulb, BA9S type	White LED Bulb / White Lens	2ALP1LB(S)
	24V AC/DC,	Green LED Bulb / Green Lens	2ALP3LB
	110VAC, 110VDC	Red LED Bulb / Red Lens	2ALP4LB
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ALP5LB
		Blue LED Bulb / Blue Lens	2ALP6LB
		White LED / Clear Lens	2ALRP7L(S)
		Yellow LED Bulb / Yellow Lens	2ALP8LB
	LED Bulb	Please mention the voltage required after the ordering code	
	Integral LED	White LED / White Lens	2ALRP1LF(S)
	24V, 110V, 230V, AC	Green LED / Green Lens	2ALRP3LF
		Red LED / Red Lens	2ALRP4LF
		Amber LED / Amber Lens	2ALRP5LF
		Blue LED / Blue Lens	2ALRP6LF
		White LED / Clear Lens	2ALRP7LF(S)
		Yellow LED / Yellow Lens	2ALRP8LF
	Flasher with Integral LED	Please mention the voltage required after the ordering code	
	<b>Illuminated Projecting type Push to ON &amp; Push to Release</b>		
	Integral LED	White LED / White Lens	2ALRPPP1L(S)
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ALRPPP3L
	110VAC, 110VDC,	Red LED / Red Lens	2ALRPPP4L
	230VAC, 220VDC	Amber LED / Amber Lens	2ALRPPP5L
		Blue LED / Blue Lens	2ALRPPP6L
		White LED / Clear Lens	2ALRPPP7L(S)
		Yellow LED / Yellow Lens	2ALRPPP8L
	Integral LED	Please mention the voltage required after the ordering code	
	LED Bulb, BA9S type	White LED Bulb / White Lens	2ALRPPP1LB(S)
	24V AC/DC,	Green LED Bulb / Green Lens	2ALRPPP3LB
	110VAC, 110VDC	Red LED Bulb / Red Lens	2ALRPPP4LB
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ALRPPP5LB
		Blue LED Bulb / Blue Lens	2ALRPPP6LB
		White LED / Clear Lens	2ALRPPP7L(S) B
		Yellow LED Bulb / Yellow Lens	2ALRPPP8LB
	LED Bulb	Please mention the voltage required after the ordering code	

# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES









## ILLUMINATED SELECTOR WITH FILAMENT BULB

	TYPE	COLOUR	ORDERING CODE
2 Position Stayput illuminated selector actuator			
		White	2ASL1-2P
	Filament bulb	Green	2ASL3-2P
	6V to 130V AC/DC	Red	2ASL4-2P
		Amber	2ASL5-2P
		Blue	2ASL6-2P
		Clear	2ASL7-2P
		Yellow	2ASL8-2P
Direct Connection	Please mention the voltage required after the ordering code		
		White	2ASLR1-2P
	Filament bulb	Green	2ASLR3-2P
	24 V,48V,110V,230V AC/DC	Red	2ASLR4-2P
		Amber	2ASLR5-2P
		Blue	2ASLR6-2P
		Clear	2ASLR7-2P
		Yellow	2ASLR8-2P
Connection with Resistor	Please mention the voltage required after the ordering code		
		White	2ASL1-2PSR
	Filament bulb	Green	2ASL3-2PSR
	6V to 130V AC/DC	Red	2ASL4-2PSR
		Amber	2ASL5-2PSR
		Blue	2ASL6-2PSR
		Clear	2ASL7-2PSR
		Yellow	2ASL8-2PSR
Direct Connection	Please mention the voltage required after the ordering code		
		White	2ASLR1-2PSR
	Filament bulb	Green	2ASLR3-2PSR
	24 V,48V,110V,230V AC/DC	Red	2ASLR4-2PSR
		Amber	2ASLR5-2PSR
		Blue	2ASLR6-2PSR
		Clear	2ASLR7-2PSR
		Yellow	2ASLR8-2PSR
Connection with Resistor	Please mention the voltage required after the ordering code		















# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

ILLUMINATED SELECTOR WITH LED			
	TYPE	COLOUR	ORDERING CODE
<b>2 Position Illuminated Selector Actuator</b>			
	Integral LED	White LED / White Lens	2ASLR1L(S)-2PSR
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ASLR3L-2PSR
	110VAC, 110VDC,	Red LED / Red Lens	2ASLR4L-2PSR
	230VAC, 220VDC	Amber LED / Amber Lens	2ASLR5L-2PSR
		Blue LED / Blue Lens	2ASLR6L-2PSR
		White LED / Clear Lens	2ASLR7L(S)-2PSR
		Yellow LED / Yellow Lens	2ASLR8L-2PSR
Integral LED	Please mention the voltage required after the ordering code		
	LED Bulb, BA9S type	White LED Bulb / White Lens	2ASL1LB(S)-2PSR
	24V AC/DC,	Green LED Bulb / Green Lens	2ASL3LB-2PSR
	110VAC, 110VDC	Red LED Bulb / Red Lens	2ASL4LB-2PSR
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ASL5LB-2PSR
		Blue LED Bulb / Blue Lens	2ASL6LB-2PSR
		White LED Bulb/ Clear Lens	2ASL7LB(S)-2PSR
		Yellow LED Bulb / Yellow Lens	2ASL8LB-2PSR
LED Bulb	Please mention the voltage required after the ordering code		
	Integral LED	White LED Bulb / White Lens	2ASLR1L(S)-2PSR
	6V, 12V, 24V, 48V AC/DC	Green LED Bulb / Green Lens	2ASLR3L-2PSR
	110VAC, 110VDC,	Red LED Bulb / Red Lens	2ASLR4L-2PSR
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ASLR5L-2PSR
		Blue LED Bulb / Blue Lens	2ASLR6L-2PSR
		White LED Bulb/ Clear Lens	2ASLR7L(S)-2PSR
		Yellow LED Bulb / Yellow Lens	2ASLR8L-2PSR
Integral LED	Please mention the voltage required after the ordering code		
	LED Bulb, BA9S type	White LED Bulb / White Lens	2ASL1LB(S)-2PSR
	24V AC/DC,	Green LED Bulb / Green Lens	2ASL3LB-2PSR
	110VAC, 110VDC	Red LED Bulb / Red Lens	2ASL4LB-2PSR
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ASL5LB-2PSR
		Blue LED Bulb / Blue Lens	2ASL6LB-2PSR
		White LED Bulb/ Clear Lens	2ASL7LB(S)-2PSR
		Yellow LED Bulb / Yellow Lens	2ASL8LB-2PSR
LED Bulb	Please mention the voltage required after the ordering code		















# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

ILLUMINATED SELECTOR WITH FILAMENT BULB			
	TYPE	COLOUR	ORDERING CODE
<b>3 Position illuminated selector actuator</b>			
		White	2ASL1-3P
	Stayput	Green	2ASL3-3P
	Filament bulb	Red	2ASL4-3P
	6V to 130V AC/DC	Amber	2ASL5-3P
		Blue	2ASL6-3P
		Clear	2ASL7-3P
		Yellow	2ASL8-3P
		White	2ASL1-3PSR
	Momentary	Green	2ASL3-3PSR
	Filament bulb	Red	2ASL4-3PSR
	6V to 130V AC/DC	Amber	2ASL5-3PSR
		Blue	2ASL6-3PSR
		Clear	2ASL7-3PSR
		Yellow	2ASL8-3PSR
<b>Direct Connection</b> 		White	2ASL1-3PSRL
	Stayput / Momentary	Green	2ASL3-3PSRL
	Filament bulb	Red	2ASL4-3PSRL
	6V to 130V AC/DC	Amber	2ASL5-3PSRL
		Blue	2ASL6-3PSRL
		Clear	2ASL7-3PSRL
		Yellow	2ASL8-3PSRL
		White	2ASL1-3PSRR
	Stayput / Momentary	Green	2ASL3-3PSRR
	Filament bulb	Red	2ASL4-3PSRR
	6V to 130V AC/DC	Amber	2ASL5-3PSRR
		Blue	2ASL6-3PSRR
		Clear	2ASL7-3PSRR
		Yellow	2ASL8-3PSRR
<b>3 Position illuminated selector actuator</b>			
		White	2ASLR1-3P
	Stayput	Green	2ASLR3-3P
	Filament bulb	Red	2ASLR4-3P
	24 V, 48V, 110V, 230V AC/DC	Amber	2ASLR5-3P
		Blue	2ASLR6-3P
		Clear	2ASLR7-3P
		Yellow	2ASLR8-3P
		White	2ASLR1-3PSR
	Momentary	Green	2ASLR3-3PSR
	Filament bulb	Red	2ASLR4-3PSR
	24 V, 48V, 110V, 230V AC/DC	Amber	2ASLR5-3PSR
		Blue	2ASLR6-3PSR
		Clear	2ASLR7-3PSR
		Yellow	2ASLR8-3PSR
<b>Connection with Resistor</b> 		White	2ASLR1-3PSRL
	Stayput / Momentary	Green	2ASLR3-3PSRL
	Filament bulb	Red	2ASLR4-3PSRL
	24 V, 48V, 110V, 230V AC/DC	Amber	2ASLR5-3PSRL
		Blue	2ASLR6-3PSRL
		Clear	2ASLR7-3PSRL
		Yellow	2ASLR8-3PSRL
		White	2ASLR1-3PSRR
	Stayput / Momentary	Green	2ASLR3-3PSRR
	Filament bulb	Red	2ASLR4-3PSRR
	24 V, 48V, 110V, 230V AC/DC	Amber	2ASLR5-3PSRR
		Blue	2ASLR6-3PSRR
		Clear	2ASLR7-3PSRR
		Yellow	2ASLR8-3PSRR

# TEKNIC


Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

ILLUMINATED SELECTOR WITH LED			
	TYPE	COLOUR	ORDERING CODE
	<b>3 Position illuminated selector actuator with Integral LED</b>		
	Stayput	White LED / White Lens	2ASLR1L(S)-3P
	Integral LED	Green LED / Green Lens	2ASLR3L-3P
	6V, 12V, 24V, 48V AC/DC	Red LED / Red Lens	2ASLR4L-3P
	110VAC, 110VDC,	Amber LED / Amber Lens	2ASLR5L-3P
	230VAC, 220VDC	Blue LED / Blue Lens	2ASLR6L-3P
		White LED / Clear Lens	2ASLR7L(S)-3P
		Yellow LED / Yellow Lens	2ASLR8L-3P
	Please mention the voltage required after the ordering code		
	Momentary	White LED / White Lens	2ASLR1L(S)-3PSR
	Integral LED	Green LED / Green Lens	2ASLR3L-3PSR
	6V, 12V, 24V, 48V AC/DC	Red LED / Red Lens	2ASLR4L-3PSR
	110VAC, 110VDC,	Amber LED / Amber Lens	2ASLR5L-3PSR
	230VAC, 220VDC	Blue LED / Blue Lens	2ASLR6L-3PSR
		White LED / Clear Lens	2ASLR7L(S)-3PSR
		Yellow LED / Yellow Lens	2ASLR8L-3PSR
	Please mention the voltage required after the ordering code		
	Stayput / Momentary	White LED / White Lens	2ASLR1L(S)-3PSRL
	Integral LED	Green LED / Green Lens	2ASLR3L-3PSRL
	6V, 12V, 24V, 48V AC/DC	Red LED / Red Lens	2ASLR4L-3PSRL
Integral LED	110VAC, 110VDC,	Amber LED / Amber Lens	2ASLR5L-3PSRL
	230VAC, 220VDC	Blue LED / Blue Lens	2ASLR6L-3PSRL
		White LED / Clear Lens	2ASLR7L(S)-3PSRL
		Yellow LED / Yellow Lens	2ASLR8L-3PSRL
	Please mention the voltage required after the ordering code		
	Stayput / Momentary	White LED / White Lens	2ASLR1L(S)-3PSRR
	Integral LED	Green LED / Green Lens	2ASLR3L-3PSRR
	6V, 12V, 24V, 48V AC/DC	Red LED / Red Lens	2ASLR4L-3PSRR
	110VAC, 110VDC,	Amber LED / Amber Lens	2ASLR5L-3PSRR
	230VAC, 220VDC	Blue LED / Blue Lens	2ASLR6L-3PSRR
		White LED / Clear Lens	2ASLR7L(S)-3PSRR
		Yellow LED / Yellow Lens	2ASLR8L-3PSRR
	Please mention the voltage required after the ordering code		
	<b>3 Position illuminated selector actuator with LED Bulb</b>		
	Stayput	White LED Bulb / White Lens	2ASL1LB(S)-3P
	LED Bulb, BA9S type	Green LED Bulb / Green Lens	2ASL3LB-3P
	24V AC/DC,	Red LED Bulb / Red Lens	2ASL4LB-3P
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	2ASL5LB-3P
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	2ASL6LB-3P
		White LED Bulb / Clear Lens	2ASL7LB(S)-3P
		Yellow LED Bulb / Yellow Lens	2ASL8LB-3P
	Please mention the voltage required after the ordering code		
	Momentary	White LED Bulb / White Lens	2ASL1LB(S)-3PSR
	LED Bulb, BA9S type	Green LED Bulb / Green Lens	2ASL3LB-3PSR
	24V AC/DC,	Red LED Bulb / Red Lens	2ASL4LB-3PSR
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	2ASL5LB-3PSR
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	2ASL6LB-3PSR
		White LED Bulb / Clear Lens	2ASL7LB(S)-3PSR
		Yellow LED Bulb / Yellow Lens	2ASL8LB-3PSR
	Please mention the voltage required after the ordering code		
	Stayput / Momentary	White LED Bulb / White Lens	2ASL1LB(S)-3PSRL
	LED Bulb, BA9S type	Green LED Bulb / Green Lens	2ASL3LB-3PSRL
	24V AC/DC,	Red LED Bulb / Red Lens	2ASL4LB-3PSRL
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	2ASL5LB-3PSRL
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	2ASL6LB-3PSRL
		White LED Bulb / Clear Lens	2ASL7LB(S)-3PSRL
		Yellow LED Bulb / Yellow Lens	2ASL8LB-3PSRL
	Please mention the voltage required after the ordering code		
	Stayput / Momentary	White LED Bulb / White Lens	2ASL1LB(S)-3PSRR
	LED Bulb, BA9S type	Green LED Bulb / Green Lens	2ASL3LB-3PSRR
	24V AC/DC,	Red LED Bulb / Red Lens	2ASL4LB-3PSRR
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	2ASL5LB-3PSRR
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	2ASL6LB-3PSRR
		White LED Bulb / Clear Lens	2ASL7LB(S)-3PSRR
		Yellow LED Bulb / Yellow Lens	2ASL8LB-3PSRR
	Please mention the voltage required after the ordering code		
Connection with Resistor	110VAC, 110VDC	Amber LED Bulb / Amber Lens	2ASL5LB-3PSRL
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	2ASL6LB-3PSRL
		White LED Bulb / Clear Lens	2ASL7LB(S)-3PSRL
		Yellow LED Bulb / Yellow Lens	2ASL8LB-3PSRL
	Please mention the voltage required after the ordering code		
	Stayput / Momentary	White LED Bulb / White Lens	2ASL1LB(S)-3PSRR
	LED Bulb, BA9S type	Green LED Bulb / Green Lens	2ASL3LB-3PSRR
	24V AC/DC,	Red LED Bulb / Red Lens	2ASL4LB-3PSRR
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	2ASL5LB-3PSRR
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	2ASL6LB-3PSRR
		White LED Bulb / Clear Lens	2ASL7LB(S)-3PSRR
		Yellow LED Bulb / Yellow Lens	2ASL8LB-3PSRR
	Please mention the voltage required after the ordering code		

# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES





## PILOT LIGHTS WITH BULB

	TYPE	COLOUR	ORDERING CODE
	<b>Pilot Light</b>		
		White	2PLB1
	Filament Bulb	Green	2PLB3
	6V to 130V AC/DC	Red	2PLB4
		Amber	2PLB5
		Blue	2PLB6
		Clear	2PLB7
		Yellow	2PLB8
Direct Connection	Please mention the voltage required after the ordering code		
		White	2PLBR1
	Filament Bulb	Green	2PLBR3
	24V, 48V, 110V, 230V, AC/DC	Red	2PLBR4
		Amber	2PLBR5
		Blue	2PLBR6
		Clear	2PLBR7
		Yellow	2PLBR8
Connection with Resistor	Please mention the voltage required after the ordering code		
		White	2PLBR1240AC
	Filament Bulb	Green	2PLBR3240AC
	230V AC	Red	2PLBR4240AC
		Amber	2PLBR5240AC
		Blue	2PLBR6240AC
		Clear	2PLBR7240AC
		Yellow	2PLBR8240AC
Connection with Resistor+Diode			
	Filament Bulb		
	Primary volt.      Sec. Volt.	White	2PLBT1XX/YYY
	110 VAC              6	Green	2PLBT3XX/YYY
	110 VAC              12	Red	2PLBT4XX/YYY
	110 VAC              24	Amber	2PLBT5XX/YYY
	Primary volt.      Sec. Volt.	Blue	2PLBT6XX/YYY
	240 VAC              6	Clear	2PLBT7XX/YYY
	240 VAC              12	Yellow	2PLBT8XX/YYY
	240 VAC              24		
Connection with Transformer	XX - Primary Voltage		
	YYY - Secondary Voltage		







# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

PILOT LIGHTS			
	TYPE	COLOUR	ORDERING CODE
	Pilot Light with Integral LED		
	Integral LED	White LED / White Lens	2PLBR1L(S)
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2PLBR3L
	110VAC, 110VDC,	Red LED / Red Lens	2PLBR4L
	230VAC, 220VDC	Amber LED / Amber Lens	2PLBR5L
		Blue LED / Blue Lens	2PLBR6L
		White LED / Clear Lens	2PLBR7L(S)
		Yellow LED / Yellow Lens	2PLBR8L
Integral LED	Please mention the voltage required after the ordering code		
	Integral LED, Flasher	White LED / White Lens	2PLBR1LF(S)
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2PLBR3LF
	110VAC, 110VDC,	Red LED / Red Lens	2PLBR4LF
	230VAC, 220VDC	Amber LED / Amber Lens	2PLBR5LF
		Blue LED / Blue Lens	2PLBR6LF
		White LED / Clear Lens	2PLBR7LF(S)
		Yellow LED / Yellow Lens	2PLBR8LF
	Flasher	Please mention the voltage required after the ordering code	
		White LED / White Lens	2PLBR1LU(S)
	Integral LED, Universal	Green LED / Green Lens	2PLBR3LU
	24V upto 240V AC / DC	Red LED / Red Lens	2PLBR4LU
		Amber LED / Amber Lens	2PLBR5LU
		Blue LED / Blue Lens	2PLBR6LU
		White LED / Clear Lens	2PLBR7LU(S)
		Yellow LED / Yellow Lens	2PLBR8LU
	Universal	Please mention the voltage required after the ordering code	
		White LED / White Lens	2PLBR1L(S)
	Integral LED	Green LED / Green Lens	2PLBR3L
	415VAC	Red LED / Red Lens	2PLBR4L
		Amber LED / Amber Lens	2PLBR5L
		Blue LED / Blue Lens	2PLBR6L
		White LED / Clear Lens	2PLBR7L(S)
		Yellow LED / Yellow Lens	2PLBR8L
	Integral LED	Please mention the voltage required after the ordering code	
	Pilot Light with Integral LED		
	LED Bulb, BA9S type	White LED Bulb / White Lens	2PLB1LB(S)
	24V AC/DC,	Green LED Bulb / Green Lens	2PLB3LB
	110VAC, 110VDC	Red LED Bulb / Red Lens	2PLB4LB
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2PLB5LB
		Blue LED Bulb / Blue Lens	2PLB6LB
		White LED Bulb / Clear Lens	2PLB7LB(S)
		Yellow LED Bulb / Yellow Lens	2PLB8LB
LED Bulb	Please mention the voltage required after the ordering code		
	Filament Bulb		
	Primary volt.	Sec. Volt.	White LED Bulb / White Lens
	110 VAC	6	Green LED Bulb / Green Lens
	110 VAC	12	Red LED Bulb / Red Lens
	110 VAC	24	Amber LED Bulb / Amber Lens
	Primary volt.	Sec. Volt.	Blue LED Bulb / Blue Lens
	240 VAC	6	White LED Bulb / Clear Lens
	240 VAC	12	Yellow LED Bulb / Yellow Lens
	240 VAC	24	
Connection with Transformer	XX - Primary Voltage YYY - Secondary Voltage		

# TEKNIC





Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

TWIN ILLUMINATED			
	Type	COLOUR	ORDERED CODE
	<b>Twin Illuminated 1 Flush, 1 Projecting (IO) Mark with Filament Bulb</b>		
	Filament bulb	Red button	2ATL5 F3P4 (IO)
	6V to 130V AC/DC	Green button	
		Amber lens	
Direct Connection	Please mention the voltage required after the ordering code		
	Filament bulb	Red button	2ATLR5 F3P4 (IO)
	24 V,48V,110V,230V AC/DC	Green button	
		Amber lens	
Connection with Resistor	Please mention the voltage required after the ordering code		
	<b>Twin Illuminated Double Flush, (IO) Mark with Filament Bulb</b>		
	Filament bulb	Red button	2ATL5 F3F4 (IO)
	6V to 130V AC/DC	Green button	
		Amber lens	
Direct Connection	Please mention the voltage required after the ordering code		
	Filament bulb	Red button	2ATLR5 F3F4 (IO)
	24 V,48V,110V,230V AC/DC	Green button	
		Amber lens	
Connection with Resistor	Please mention the voltage required after the ordering code		

# TEKNIC





## Control & Signalling Devices 22.5 Ø METALLIC SERIES

### TWIN ILLUMINATED WITH LED

	TYPE	COLOUR	ORDERING CODE
	<b>Twin Illuminated 1 Flush, 1 Projecting (IO) Mark</b>		
	Integral LED	Green	2ATLR5LF3P4 (IO)
	6V, 12V, 24V, 48V AC/DC	Red	
	110VAC, 110VDC, 230VAC, 220VDC	Amber lens	
<b>Integral LED</b>	<b>Please mention the voltage required after the ordering code</b>		
	LED Bulb,BA9S type	Green	2ATL5LBF3P4 (IO)
	24V AC/DC,	Red	
	110VAC, 110VDC	Amber lens	
	230VAC, 220VDC		
<b>LED Bulb</b>	<b>Please mention the voltage required after the ordering code</b>		
	Integral LED	Green	2ATLR5LF3F4 (IO)
	6V, 12V, 24V, 48V AC/DC	Red	
	110VAC, 110VDC, 230VAC, 220VDC	Amber lens	
<b>Integral LED</b>	<b>Please mention the voltage required after the ordering code</b>		
	LED Bulb,BA9S type	Green	
	24V AC/DC,	Red	
	110VAC, 110VDC	Amber lens	
	230VAC, 220VDC		
<b>LED Bulb</b>	<b>Please mention the voltage required after the ordering code</b>		

# TEKNIC

## Control & Signalling Devices 22.5 Ø METALLIC SERIES





ILLUMINATED MUSHROOM			
	TYPE	COLOUR	ORDERING CODE
	<b>Illuminated Mushroom, Momentary with Filament Bulb</b>		
	Filament bulb	Red	2ALM4
	6V to 130V AC/DC		
Direct Connection	Please mention the voltage required after the ordering code		
			
	Filament bulb	Red	2ALRM4
	24 V,48V,110V,230V AC/DC		
Connection with Resistor	Please mention the voltage required after the ordering code		
	<b>Illuminated Mushroom, Push Pull with Filament Bulb</b>		
	Filament bulb	Red	2ALMPP4
	6V to 130V AC/DC		
Direct Connection	Please mention the voltage required after the ordering code		
			
	Filament bulb	Red	2ALRMPP4
	24 V,48V,110V,230V AC/DC		
Connection with Resistor	Please mention the voltage required after the ordering code		



# TEKNIC

Control & Signalling Devices 22.5 Ø

METALLIC SERIES

ILLUMINATED MUSHROOM WITH LED			
	TYPE	COLOUR	ORDERING CODE
	Illuminated Mushroom, Momentary		
	Integral LED	Red	2ALRM4L
	6V, 12V, 24V, 48V AC/DC		
	110VAC, 110VDC,		
	230VAC, 220VDC		
Integral LED	Please mention the voltage required after the ordering code		
			
	LED Bulb, BA9S type	Red	2ALM4LB
	24V AC/DC,		
	110VAC, 110VDC		
	230VAC, 220VDC		
LED Bulb	Please mention the voltage required after the ordering code		
	Illuminated Mushroom, Push Pull		
	Integral LED	Red	2ALRMPP4L
	6V, 12V, 24V, 48V AC/DC		
	110VAC, 110VDC,		
	230VAC, 220VDC		
Integral LED	Please mention the voltage required after the ordering code		
			
	LED Bulb, BA9S type	Red	2ALMPP4LB
	24V AC/DC,		
	110VAC, 110VDC		
	230VAC, 220VDC		
LED Bulb	Please mention the voltage required after the ordering code		

# TEKNIC

Control & Signalling Devices 22.5 Ø  
METALLIC SERIES

CONTACT ELEMENTS		
	TYPE	ORDERING CODE
	PANEL MOUNTING	
	NORMALLY OPEN (NO)	S1
	SILVER CONTACT	
	NORMALLY OPEN (NO)	S1S
	SILVER CONTACT	
	(BREAK BEFORE MAKE)	
	NORMALLY OPEN (NO)	S1E
	SILVER CONTACT	
	( MAKE BEFORE BREAK )	
	NORMALLY CLOSED (NC)	S2
	SILVER CONTACT	
	NORMALLY OPEN (NO)	S3
	GOLD CONTACT	
	NORMALLY CLOSED (NC)	S4
	GOLD CONTACT	
	BASE MOUNTING	
	NORMALLY OPEN (NO)	S5
	SILVER CONTACT	
	NORMALLY CLOSED (NC)	S6
	SILVER CONTACT	
	NORMALLY OPEN (NO)	S7
	GOLD CONTACT	
	NORMALLY CLOSED (NC)	S8
	GOLD CONTACT	

# Common types of control and signalling devices Ø 22.5

Description	Type of Actuator or Lense Assembly	Colour of Actuator or Lense	Contact Elements NO = S1 NC = S2 or Lamp Holder	Type of complete Control or Signalling Device	
Flush Pushbutton	2AF3	Green	1NO	2PSF310	
	2AF8	Yellow	2NO+1NC	2PSF821	
Projecting Pushbutton	2AP2	Black	2NC	2PSP202	
	2AP4	Red	3NO+3NC	2PSP433	
Mushroom Pushbutton Spring return	2AM2	Black	1NO+1NC	2PSM211	
	2AM4	Red	1NC	2PSM401	
Mushroom Pushbutton latching turn to release	2AML2	Black	1NC	2PSML201	
	2AML4	Red	2NO+2NC	2PSML422	
Mushroom Pushbutton latching, key to release	2AMLKB4	Red	1NO+1NC	2PSMLKB411	
Selector Actuator(2Pos)	2AS2-2P	Black	1NO	2PSS210-2P	
Selector Actuator(3Pos)	2AS2-3P	Red	1NO+1NC	2PSS211-3P	
Key Actuator (2Pos), Key withdrawable in both positions	2AK2-2PB		1NO	2PSK210-2PB	
Key Actuator (3Pos), Key withdrawable in left & right positions	2AK2-3PB		1NO+1NC	2PSK211-3PB	
Selector Illuminated Pushbutton, 2 position with resistance and diode (230V)	2ASLR3-2P230AC	Green	1NO+1NC + 2LHBR230AC	2PSSLR311-2P230AC	
Selector Illuminated Pushbutton, 3 Position with resistance (24V)	2ASLR4-3P24	Red	1NO+1NC + 2LHBR24	2PSSLR411-3P24	
Pilot Light for direct connection upto 130V	2LA3	Green	2LHB24	2PLB324	
	2LA4	Red	2LHB130	2PLB4130	
Pilot Light through resistor and diode for 230 V AC. Bulb:130V.	2LA5	Amber	2LHBR230AC	2PLBR5230AC	
	2LA6	Blue	2LHBR230AC	2PLBR6230AC	
Pilot Light with transformer for for 230 V Bulb:24 V.	2LA4	Red	2LHBT230/24	2PLBT4230/24	
	2LA3	Green	2LHBT230/24	2PLBT3230/24	
Flush Illuminated Pushbutton with integral LED for 24 V DC	2ALRF3L24DC	Green	1NO+1NC + 2LHLR24DC	2PSLRF3L1124DC	
Projecting Illuminated Pushbutton with integral LED 230 V AC	2ALRP4L230AC	Red	1NO+1NC + 2LHLR230AC	2PSLRP4L11230AC	
Pilot Light with LED bulb for 110 V Bulb:110 V	2LAL5	Amber	2LHLB110	2PLB5LB110	
Twin Pushbutton marked "I O"	2ATF2-F4-IO	Flush-Black	1 NO	2PSTF210-F401-IO	
Flush - Flush		Flush-Red	1 NC		
Twin Pushbutton not marked	2ATF3-P4	Flush-Green	1NO+1NC	2PSTF311-P411	
Flush - Projecting		Proj-Red	1NO+1NC		
Twin Illuminated Pushbutton marked "I O" Flush - Flush direct connection (130V)	2ATL3-F2-F4 IO130	Lense-Green Flush-Black Flush-Red	2LHB130 1 NO + 1 NC 1 NC	2PSTL3F211-F401-IO130	
Twin Illuminated Pushbutton not marked Flush - Projecting with resistance (24V)	2ATLR5-F3-P424	Lense-Amber Flush-Green Proj.-Red	2LHBR24 1 NO 1 NC	2PSTLR5F310-P40124	