

TEKNIC



Control and Signaling Devices Ø 22.5 Plastic Series



Control and signalling devices Ø 22.5 P series

Salient features

This range of Ø 22.5 P series pushbuttons, selector switches, illuminated switches, and pilot lights in engineering plastic construction have been designed to provide the following salient features:


- Economy of space • Aesthetically elegant • SELF WIPING CONTACTS • Robust in materials of construction
- Larger operating surface than Ø 30.5 series • Simple to fix - screw driver is all that is required
- Safe in operation
 - Fixing method unaffected by excessive vibration-unit does not rotate
 - Very good flame resistance
 - Protection against electrical shock
 - Shrouded terminals
 - Resistant to corrosion

Actuators

The circular actuators have black plastic bezels, and are functionally interchangeable on the different types of contact elements.

Contact elements

The contact elements are double break and have **self wiping** contacts. The elements are interchangeable and can be stacked without additional hardware. 1 to 6 elements (NO or NC) can be used with non illuminated actuators, whereas, 1 to 4 elements (NO or NC) can be used for illuminated actuators. **Gold plated NO and NC contact elements for low voltage, low current switching circuits, < 25 mA, are available.**



Illuminated pushbuttons and pilot lights

Pilot lights and illuminated switches are suitable for direct connection, through series resistor, through series resistor and diode, using bayonet cap filament bulb type BA9S, as follows :

Supply voltage for direct connection without series resistor : 6V-130V

Supply voltage through series resistor..... : 12V-415V

Supply voltage through series resistor and diode : 230V AC

Bulb : Filament, type BA9s with OAL max., 28 mm

Pilot lights and illuminated actuators are available with integral LED chips, suitable for operating at various voltages namely 6V, 12V, 24V, 30V, 48V, 63.5V, 110V, 125V, 230V AC or DC and 415 volts AC. Pilot lights and illuminated actuators are available with LED bulbs (bayonet cap, BA9S design with OAL max. 28 mm) suitable for operating at various voltages namely 24V, 110V and 230V. On request an extra short circuit protection consisting of built in fuse in the LED modules can be provided.

Pilot lights are available with built in transformers suitable for operating at 230, 110 volts AC input and 6 V, 12 V and 24V output.


Terminals

Contact elements and pilot lights are designed to have shrouded terminals with combi screws.

Fixing

The P series control devices Ø 22.5 can be fixed in any position on panels of 1 to 5 mm thickness. We recommend minimum fixing centres of 30mm X 40mm.

However, the dimensions and configuration should be decided on the basis of the application. The actuators and the lense assemblies lock on the holding bracket. Details of the assembly shown in diagram.

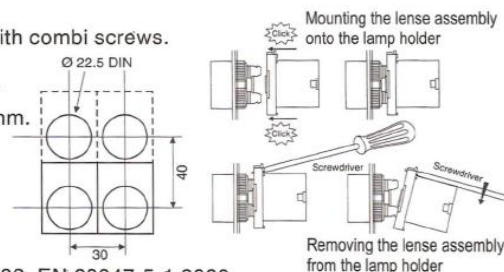

Electrical and mechanical characteristics

Environment

Standards conformity	: CSA - C22.2 No. 14-95, UL508, EN 60947-5-1 2000
Approvals	: CSA - C22.2 No. 14-95, UL508, VDE 0660
Degree of protection	: IP 65 as per IEC 529, NEMA 4X, 12 as per UL 50
Ambient	: - 25° C to + 70° C
Operating position	: All positions

Contact Block

Rated insulation voltage	:	500 V																
Rated thermal current	:	10 A																
Contact operation	:	Self wiping , slow break NO or NC																
Make and break capacity																		
As per IEC 947 - 5 - (1) 1990	:	AC 15 4 A, 415 V AC DC 13 0.5 A, 110 V DC																
Terminal capacity	:	Minimum 1 x 0.5 mm ² , maximum 2 x 1.5 mm ² or 1 x 2.5 mm ²																
Terminal marking	:	1-2 for NC, 3-4 for NO																
Short circuit protection	:	10 A cartridge fuse HRC type, rated for resistive loading																
Mechanical life	:	Over 1 million operations																
Electrical rating	:																	
(for 1 million operating cycles, operating at 3600 cycles per hour, load factor 0.5)		<table><tr><td>AC 15</td><td>V</td><td>24</td><td>120</td><td>230</td><td>DC 13</td><td>V</td><td>24</td></tr><tr><td></td><td>A</td><td>4</td><td>3</td><td>2</td><td></td><td>A</td><td>0.5</td></tr></table>	AC 15	V	24	120	230	DC 13	V	24		A	4	3	2		A	0.5
AC 15	V	24	120	230	DC 13	V	24											
	A	4	3	2		A	0.5											

Modules for pilot light & illuminated switches with integral LED / multichip LED bulb (BA9S cap)

Current consumptions (applicable to all colours)

24 VAC/DC, 110 VAC & 240 VAC

: max. 20 mA

110 VDC

: max. 15 mA

220 VDC

: max. 10 mA

Service life (at nominal voltage and at ambient temperature of 25° C)

: 100,000 hours

Voltage limits (nominal voltage)

: < 20% of rated voltage >

Short circuit protection

: on specific request

Terminal capacity

: min. 1 x 0.5 mm², max. 2 x 1.5 mm² or 1 x 2.5 mm²

Control and signalling devices Ø 22.5 P series

Ordering instructions

1. Actuators, illuminated actuators, contact elements, lense assemblies & pilot lights can all be ordered separately or in combination.
2. Prefix P2 for all actuators and combinations indicates Ø 22.5 P series.
3. The type numbers of contact elements are : NO: Actuator mounting : S1, S3 Note:
Individual mounting : S5, S7 S3, S4, S7, S8 are gold plated contacts
NC: Actuator mounting : S2, S4 suitable for low voltage, low current
Individual mounting : S6, S8 switching circuits < 25 mA

Some examples of type numbers:

Actuator : Type P2AF3 is flush actuator, GREEN
Pilot light : Type P2PLB4 is pilot light without series resistor, RED
Complete pushbutton : Type P2PSF411 is flush pushbutton, RED, with 1NO+1NC contact elements
1NC element S2
1NO element S1
Colour actuator, RED
Ø 22.5 flush type pushbutton

Accessories and spares

Legend plates

Legend plates 30 x 40 mm are supplied with the following standard texts:

START FORWARD UP OPEN AUTO SLOW RESET ON RIGHT TRIP
STOP REVERSE DOWN CLOSE HAND FAST INCH OFF LEFT POWER ON
Legend plate Ø 60 mm yellow with black characters for **EMERGENCY STOP**



Filament bulb

Filament bulb type BA9S, OAL 28mm

Voltage	: 6	12	24	30	48	60	130
Watts	: 1	2	2	2	2	2	2.6



LED bulb

LED multichip bulb type BA9S, OAL 28mm

Colour	: White	Green	Red	Amber	Blue	Yellow	V	W
Type No.	: MCB9124	MCB9324	MCB9424	MCB9524	MCB9624	MCB9824	24	0.5
	MCB91110	MCB93110	MCB94110	MCB95110	MCB96110	MCB98110	110	1.0
	MCB91230	MCB93230	MCB94230	MCB95230	MCB96230	MCB98230	230	1.0



Lenses

Colour of lense : Translucent White Green Red Amber Blue Clear Yellow

For pilot lights with filament bulb 2PLL1 2PLL3 2PLL4 2PLL5 2PLL6 2PLL7 2PLL8

For illuminated actuators with filament bulb (flush/projecting) 2LAL1 2LAL3 2LAL4 2LAL5 2LAL6 2LAL7 2LAL8


For pilot lights with LED 2PLL1L 2PLL3L 2PLL4L 2PLL5L 2PLL6L 2PLL7L 2PLL8L

For illuminated actuators with LED (flush/projecting) 2LAL1L 2LAL3L 2LAL4L 2LAL5L 2LAL6L 2LAL7L 2LAL8L



Adaptor for fixing Ø 22.5 devices in Ø 30.5 cutout.

Type No. : 2ADP



Fixing flange

Type No. : P2BRK



Padlock

For mushroom actuator : type no. 2PAM

For projecting actuator : type no. 2PAP



Boot for non ill. flush actuator

Colour of Boot : Clear

Type No : 2BT7



Boot for flush / projecting illuminated actuator

Colour of Boot : Clear

Type No : 2ALBT7



Boot for twin actuator

Colour of Boot : Clear

Type No : 2ATBT7



Boot for twin illuminated actuator


Colour of Boot : Clear

Type No : 2ATLBT7



Bulb extractor

Type No. : 2BA9SE




Blanking plug for Ø 22.5 hole, black

Type No. : 2BP2



TEKNIC

Control & Signalling Devices 22.5 Ø PLASTIC SERIES

MOMENTARY ACTUATORS			
	TYPE	COLOUR	ORDERING CODE
			
		White	P2AF1
		Black	P2AF2
	Flush	Green	P2AF3
		Red	P2AF4
		Blue	P2AF6
		Yellow	P2AF8
			
	Flush with Arrow marking	White	P2AF1A
		Black	P2AF2A
			
		White	P2AP1
		Black	P2AP2
	Projecting	Green	P2AP3
		Red	P2AP4
		Blue	P2AP6
		Yellow	P2AP8
			
		White	P2AF1RR
		Black	P2AF2RR
	Flush Relay Reset Actuators	Green	P2AF3RR
		Red	P2AF4RR
		Blue	P2AF6RR
		Yellow	P2AF8RR
			
		White	P2AF1BT7
		Black	P2AF2BT7
	Booted	Green	P2AF3BT7
		Red	P2AF4BT7
		Blue	P2AF6BT7
		Yellow	P2AF8BT7

TEKNIC

Control & Signalling Devices 22.5 Ø PLASTIC SERIES

MUSHROOM HEAD ACTUATORS

	TYPE	COLOUR	ORDERING CODE
			
		Black	P2AM2
	Momentary	Green	P2AM3
	Ø 40mm	Red	P2AM4
		Blue	P2AM6
		Yellow	P2AM8
			
	Push Pull	Black	P2AMPP2
	Ø 40 mm	Red	P2AMPP4
			
	Latching	Black	P2AMLS2
	Ø 30mm	Red	P2AMLS4
			
	Latching	Black	P2AML2
	Ø 40mm	Red	P2AML4
			
	Latching	Black	P2AMLKB2
	with Key	Red	P2AMLKB4
	Ø 40mm		

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

MUSHROOM HEAD ACTUATORS			
	TYPE	COLOUR	ORDERING CODE
			
		Black	P2AMJ2
	Momentary	Green	P2AMJ3
	Ø 60mm	Red	P2AMJ4
		Blue	P2AMJ6
		Yellow	P2AMJ8
			
	Push Pull	Black	P2AMPPJ2
	Ø 60 mm	Red	P2AMPPJ4
			
	Latching	Black	P2AMLJ2
	Ø 60mm	Red	P2AMLJ4
			
	Trigger type	Black	P2AMLT2
	Press to Lock	Red	P2AMLT4
	turn to release		
	Ø 40 mm		
			
	Trigger type	Black	P2AMLTKB2
	Press to Lock	Red	P2AMLTKB4
	key to release		
	Ø 40 mm		
			
	Trigger type		
	Press to Lock	Red	P2AMPPT4
	pull to release		
	Ø 40 mm		

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

SELECTOR ACTUATORS

	TYPE	COLOUR	ORDERING CODE
	Selector 2 position LATCHING	Black	P2AS2-2P
	with ext. knob		P2AS2E-2P
	2 position MOMENTARY	Black	P2AS2-2PSR
	with ext. knob		P2AS2E-2PSR
			
	3 position STAY PUT	Black	P2AS2-3P
	with ext. knob		P2AS2E-3P
	MOMENTARY on both sides	Black	P2AS2-3PSR
	with ext. knob		P2AS2E-3PSR
	3 position MOMENTARY on right	Black	P2AS2-3PSRR
	with ext. knob		P2AS2E-3PSRR
	3position MOMENTARY on left	Black	P2AS2-3PSRL
with ext. knob		P2AS2E-3PSRL	

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

KEY SELECTOR ACTUATORS



TYPE		COLOUR	ORDERING CODE
2 Position Stayput		Black	P2AK2-2PB
			P2AK2-2PO
			P2AK2-2PI
Spring Return		Black	P2AK2-2POSR
3 Position Stayput		Black	P2AK2-3PA
		Black	P2AK2-3PB
		Black	P2AK2-3PC
Spring Return		Black	P2AK2-3PSR
Spring Return right to centre		Black	P2AK2-3PSRR
Spring Return left to centre		Black	P2AK2-3PSRL
* X stands for position in which key is removable			

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

TWIN ACTUATORS

	TYPE	COLOUR	ORDERING CODE
		Green	P2ATF3F4
	Double Flush	Red	
	w/o IO Mark		
		Yellow	P2ATF8F2
		Black	
			
		Green	P2ATF3F4(IO)
	Double Flush	Red	
	with IO Mark		
		Yellow	P2ATF8F2(IO)
		Black	
			
		Green	P2ATF3P4
	1 Flush,	Red	
	1 Projecting		
	w/o IO Mark	Yellow	P2ATF8P2
		Black	
			
		Green	P2ATF3P4(IO)
	1 Flush,	Red	
	1 Projecting		
	with IO Mark	Yellow	P2ATF8P2(IO)
		Black	

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

ILLUMINATED MOMENTARY ACTUATORS WITH BULB

	TYPE	COLOUR	ORDERING CODE
	Illuminated Flush		
		White	P2ALF1
	Filament Bulb	Green	P2ALF3
	6V to 130V AC/DC	Red	P2ALF4
		Amber	P2ALF5
		Blue	P2ALF6
		Clear	P2ALF7
		Yellow	P2ALF8
Direct Connection	Please mention the voltage required after the ordering code		
		White	P2ALRF1
		Green	P2ALRF3
	Filament Bulb	Red	P2ALRF4
	24V,48V,130V,230V AC/DC	Amber	P2ALRF5
		Blue	P2ALRF6
		Clear	P2ALRF7
		Yellow	P2ALRF8
Connection with Resistor	Please mention the voltage required after the ordering code		
	Illuminated Projecting		
		White	P2ALP1
		Green	P2ALP3
	Filament Bulb	Red	P2ALP4
	6V to 130V AC/DC	Amber	P2ALP5
		Blue	P2ALP6
		Clear	P2ALP7
		Yellow	P2ALP8
Direct Connection	Please mention the voltage required after the ordering code		
		White	P2ALRP1
		Green	P2ALRP3
	Filament Bulb	Red	P2ALRP4
	24V,48V,130V,230V AC/DC	Amber	P2ALRP5
		Blue	P2ALRP6
		Clear	P2ALRP7
		Yellow	P2ALRP8
Connection with Resistor	Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø PLASTIC SERIES

ILLUMINATED ACTUATORS WITH INTEGRAL LED / LED BULB


	Type	Colour of LED / Lens	Ordering Code
	Illuminated Flush, Momentary		
			
	Integral LED	White LED / White Lens	P2ALRF1L(S)
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	P2ALRF3L
	110VAC, 110VDC,	Red LED / Red Lens	P2ALRF4L
	230VAC, 220VDC	Amber LED / Amber Lens	P2ALRF5L
		Blue LED / Blue Lens	P2ALRF6L
		White LED / Clear Lens	P2ALRF7L(S)
		Yellow LED / Yellow Lens	P2ALRF8L
Integral LED	Please mention the voltage required after the ordering code		
			
	LED Bulb, BA9S type	White LED Bulb / White Lens	P2ALF1LB(S)
	24V AC/DC,	Green LED Bulb / Green Lens	P2ALF3LB
	110VAC, 110VDC	Red LED Bulb / Red Lens	P2ALF4LB
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	P2ALF5LB
		Blue LED Bulb / Blue Lens	P2ALF6LB
		White LED Bulb/ Clear Lens	P2ALF7LB(S)
		Yellow LED Bulb / Yellow Lens	P2ALF8LB
LED Bulb	Please mention the voltage required after the ordering code		
	Illuminated Projecting, Momentary		
			
	Integral LED	White LED / White Lens	P2ALRP1L(S)
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	P2ALRP3L
	110VAC, 110VDC,	Red LED / Red Lens	P2ALRP4L
	230VAC, 220VDC	Amber LED / Amber Lens	P2ALRP5L
		Blue LED / Blue Lens	P2ALRP6L
		White LED / Clear Lens	P2ALRP7L(S)
		Yellow LED / Yellow Lens	P2ALRP8L
Integral LED	Please mention the voltage required after the ordering code		
			
		White LED Bulb / White Lens	P2ALP1LB(S)
	LED Bulb, BA9S type	Green LED Bulb / Green Lens	P2ALP3LB
	24V AC/DC,	Red LED Bulb / Red Lens	P2ALP4LB
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	P2ALP5LB
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	P2ALP6LB
		White LED Bulb/ Clear Lens	P2ALP7LB(S)
		Yellow LED Bulb / Yellow Lens	P2ALP8LB
LED Bulb	Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

ILLUMINATED SELECTOR WITH BULB

	TYPE	COLOUR	ORDERING CODE
	2 Position Stayput illuminated selector actuator		
		White	P2ASL1-2P
		Green	P2ASL3-2P
		Red	P2ASL4-2P
	Filament Bulb	Amber	P2ASL5-2P
	6V to 130V AC/DC	Blue	P2ASL6-2P
		Clear	P2ASL7-2P
		Yellow	P2ASL8-2P
Direct Connection	Please mention the voltage required after the ordering code		
		White	P2ASLR1-2P
		Green	P2ASLR3-2P
	Filament Bulb	Red	P2ASLR4-2P
	24V,48V,130V,230V AC/DC	Amber	P2ASLR5-2P
		Blue	P2ASLR6-2P
		Clear	P2ASLR7-2P
		Yellow	P2ASLR8-2P
Connection with Resistor	Please mention the voltage required after the ordering code		
	2 Position, Momentary illuminated selector actuator		
		White	P2ASL1-2PSR
		Green	P2ASL3-2PSR
	Filament Bulb	Red	P2ASL4-2PSR
	6V to 130V AC/DC	Amber	P2ASL5-2PSR
		Blue	P2ASL6-2PSR
		Clear	P2ASL7-2PSR
		Yellow	P2ASL8-2PSR
Direct Connection	Please mention the voltage required after the ordering code		
		White	P2ASLR1-2PSR
	Filament Bulb	Green	P2ASLR3-2PSR
	24V,48V,130V,230V AC/DC	Red	P2ASLR4-2PSR
		Amber	P2ASLR5-2PSR
		Blue	P2ASLR6-2PSR
		Clear	P2ASLR7-2PSR
		Yellow	P2ASLR8-2PSR
Connection with Resistor	Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

ILLUMINATED SELECTOR ACTUATOR WITH LED			
	TYPE	Colour of LED / Lens	ORDERING CODE
	2 Position Stayput illuminated selector actuator		
	Integral LED	White LED / White Lens	P2ASLR1L(S)-2P
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	P2ASLR3L-2P
	110VAC, 110VDC,	Red LED / Red Lens	P2ASLR4L-2P
	230VAC, 220VDC	Amber LED / Amber Lens	P2ASLR5L-2P
		Blue LED / Blue Lens	P2ASLR6L-2P
		White LED / Clear Lens	P2ASLR7L(S)-2P
		Yellow LED / Yellow Lens	P2ASLR8L-2P
Integral LED	Please mention the voltage required after the ordering code		
	LED Bulb BA9S type	White LED Bulb / White Lens	P2ASL1LB(S)-2P
	24V AC/DC,	Green LED Bulb / Green Lens	P2ASL3LB-2P
	110VAC, 110VDC	Red LED Bulb / Red Lens	P2ASL4LB-2P
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	P2ASL5LB-2P
		Blue LED Bulb / Blue Lens	P2ASL6LB-2P
		White LED Bulb / Clear Lens	P2ASL7LB(S)-2P
		Yellow LED Bulb / Yellow Lens	P2ASL8LB-2P
LED Bulb	Please mention the voltage required after the ordering code		
	Integral LED	White LED / White Lens	P2ASLR1L(S)-2PSR
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	P2ASLR3L-2PSR
	110VAC, 110VDC,	Red LED / Red Lens	P2ASLR4L-2PSR
	230VAC, 220VDC	Amber LED / Amber Lens	P2ASLR5L-2PSR
		Blue LED / Blue Lens	P2ASLR6L-2PSR
		White LED / Clear Lens	P2ASLR7L(S)-2PSR
		Yellow LED / Yellow Lens	P2ASLR8L-2PSR
Integral LED	Please mention the voltage required after the ordering code		
	LED Bulb BA9S type	White LED Bulb / White Lens	P2ASL1LB(S)-2PSR
	24V AC/DC,	Green LED Bulb / Green Lens	P2ASL3LB-2PSR
	110VAC, 110VDC	Red LED Bulb / Red Lens	P2ASL4LB-2PSR
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	P2ASL5LB-2PSR
		Blue LED Bulb / Blue Lens	P2ASL6LB-2PSR
		White LED Bulb / Clear Lens	P2ASL7LB(S)-2PSR
		Yellow LED Bulb / Yellow Lens	P2ASL8LB-2PSR
LED Bulb	Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø
PLASTIC SERIES

ILLUMINATED SELECTOR WITH BULB			
	TYPE	COLOUR	ORDERING CODE
3 Position Stayput illuminated selector actuator			
	Stayput	White	P2ASL1-3P
	Filament Bulb	Green	P2ASL3-3P
	6V to 130V AC/DC	Red	P2ASL4-3P
		Amber	P2ASL5-3P
		Blue	P2ASL6-3P
		Clear	P2ASL7-3P
		Yellow	P2ASL8-3P
	Please mention the voltage required after the ordering code		
	Momentary	White	P2ASLR1-3PSR
	Filament Bulb	Green	P2ASLR3-3PSR
Direct Connection 	6V to 130V AC/DC	Red	P2ASLR4-3PSR
		Amber	P2ASLR5-3PSR
		Blue	P2ASLR6-3PSR
		Clear	P2ASLR7-3PSR
		Yellow	P2ASLR8-3PSR
	Please mention the voltage required after the ordering code		
	Momentary / Stayput	White	P2ASLR1-3PSRL
	Filament Bulb	Green	P2ASLR3-3PSRL
	6V to 130V AC/DC	Red	P2ASLR4-3PSRL
		Amber	P2ASLR5-3PSRL
Connection with Resistor 		Blue	P2ASLR6-3PSRL
		Clear	P2ASLR7-3PSRL
		Yellow	P2ASLR8-3PSRL
	Please mention the voltage required after the ordering code		
	Momentary / Stayput	White	P2ASLR1-3PSRR
	Filament Bulb	Green	P2ASLR3-3PSRR
	6V to 130V AC/DC	Red	P2ASLR4-3PSRR
		Amber	P2ASLR5-3PSRR
		Blue	P2ASLR6-3PSRR
		Clear	P2ASLR7-3PSRR
Connection with Resistor 		Yellow	P2ASLR8-3PSRR
	Please mention the voltage required after the ordering code		
	3 Position illuminated selector actuator		
	Stayput	White	P2ASLR1-3P
	Filament Bulb	Green	P2ASLR3-3P
	24V, 48V, 130V, 230V AC/DC	Red	P2ASLR4-3P
		Amber	P2ASLR5-3P
		Blue	P2ASLR6-3P
		Clear	P2ASLR7-3P
		Yellow	P2ASLR8-3P
Connection with Resistor 	Please mention the voltage required after the ordering code		
	Momentary	White	P2ASLR1-3PSR
	Filament Bulb	Green	P2ASLR3-3PSR
	24V, 48V, 130V, 230V AC/DC	Red	P2ASLR4-3PSR
		Amber	P2ASLR5-3PSR
		Blue	P2ASLR6-3PSR
		Clear	P2ASLR7-3PSR
		Yellow	P2ASLR8-3PSR
	Please mention the voltage required after the ordering code		
	Momentary / Stayput	White	P2ASLR1-3PSRL
Connection with Resistor 	Filament Bulb	Green	P2ASLR3-3PSRL
	24V, 48V, 130V, 230V AC/DC	Red	P2ASLR4-3PSRL
		Amber	P2ASLR5-3PSRL
		Blue	P2ASLR6-3PSRL
		Clear	P2ASLR7-3PSRL
		Yellow	P2ASLR8-3PSRL
	Please mention the voltage required after the ordering code		
	Momentary / Stayput	White	P2ASLR1-3PSRR
	Filament Bulb	Green	P2ASLR3-3PSRR
	24V, 48V, 130V, 230V AC/DC	Red	P2ASLR4-3PSRR
Connection with Resistor 		Amber	P2ASLR5-3PSRR
		Blue	P2ASLR6-3PSRR
		Clear	P2ASLR7-3PSRR
		Yellow	P2ASLR8-3PSRR
	Please mention the voltage required after the ordering code		
	Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø PLASTIC SERIES

ILLUMINATED SELECTOR WITH LED			
	TYPE	Colour of LED / Lens	ORDERING CODE
3 Position Illuminated Selector Actuator			
	Stayput	White LED / White Lens	P2ASLR1L(S)-3P
	Integral LED	Green LED / Green Lens	P2ASLR3L-3P
	6V, 12V, 24V, 48V AC/DC	Red LED / Red Lens	P2ASLR4L-3P
	110VAC, 110VDC,	Amber LED / Amber Lens	P2ASLR5L-3P
	230VAC, 220VDC	Blue LED / Blue Lens	P2ASLR6L-3P
		White LED / Clear Lens	P2ASLR7L(S)-3P
		Yellow LED / Yellow Lens	P2ASLR8L-3P
	Please mention the voltage required after the ordering code		
	Momentary	White LED / White Lens	P2ASLR1L(S)-3PSR
	Integral LED	Green LED / Green Lens	P2ASLR3L-3PSR
	6V, 12V, 24V, 48V AC/DC	Red LED / Red Lens	P2ASLR4L-3PSR
	110VAC, 110VDC,	Amber LED / Amber Lens	P2ASLR5L-3PSR
	230VAC, 220VDC	Blue LED / Blue Lens	P2ASLR6L-3PSR
		White LED / Clear Lens	P2ASLR7L(S)-3PSR
		Yellow LED / Yellow Lens	P2ASLR8L-3PSR
	Please mention the voltage required after the ordering code		
	Momentary/Stayput	White LED / White Lens	P2ASLR1L(S)-3PSRL
	Integral LED	Green LED / Green Lens	P2ASLR3L-3PSRL
	6V, 12V, 24V, 48V AC/DC	Red LED / Red Lens	P2ASLR4L-3PSRL
	110VAC, 110VDC,	Amber LED / Amber Lens	P2ASLR5L-3PSRL
	230VAC, 220VDC	Blue LED / Blue Lens	P2ASLR6L-3PSRL
		White LED / Clear Lens	P2ASLR7L(S)-3PSRL
		Yellow LED / Yellow Lens	P2ASLR8L-3PSRL
	Please mention the voltage required after the ordering code		
	Momentary/Stayput	White LED / White Lens	P2ASLR1L(S)-3PSRR
	Integral LED	Green LED / Green Lens	P2ASLR3L-3PSRR
	6V, 12V, 24V, 48V AC/DC	Red LED / Red Lens	P2ASLR4L-3PSRR
	110VAC, 110VDC,	Amber LED / Amber Lens	P2ASLR5L-3PSRR
	230VAC, 220VDC	Blue LED / Blue Lens	P2ASLR6L-3PSRR
		White LED / Clear Lens	P2ASLR7L(S)-3PSRR
		Yellow LED / Yellow Lens	P2ASLR8L-3PSRR
	Please mention the voltage required after the ordering code		
	Momentary	White LED Bulb / White Lens	P2ASL1LB(S)-3P
	LED Bulb BA9S type	Green LED Bulb / Green Lens	P2ASL3LB-3P
	24V AC/DC,	Red LED Bulb / Red Lens	P2ASL4LB-3P
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	P2ASL5LB-3P
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	P2ASL6LB-3P
		White LED Bulb / Clear Lens	P2ASL7LB(S)-3P
		Yellow LED Bulb / Yellow Lens	P2ASL8LB-3P
	Please mention the voltage required after the ordering code		
	Momentary	White LED Bulb / White Lens	P2ASL1LB(S)-3PSR
	LED Bulb BA9S type	Green LED Bulb / Green Lens	P2ASL3LB-3PSR
	24V AC/DC,	Red LED Bulb / Red Lens	P2ASL4LB-3PSR
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	P2ASL5LB-3PSR
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	P2ASL6LB-3PSR
		White LED Bulb / Clear Lens	P2ASL7LB(S)-3PSR
		Yellow LED Bulb / Yellow Lens	P2ASL8LB-3PSR
	Please mention the voltage required after the ordering code		
	Momentary / Stayput	White LED Bulb / White Lens	P2ASL1LB(S)-3PSRL
	LED Bulb BA9S type	Green LED Bulb / Green Lens	P2ASL3LB-3PSRL
	24V AC/DC,	Red LED Bulb / Red Lens	P2ASL4LB-3PSRL
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	P2ASL5LB-3PSRL
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	P2ASL6LB-3PSRL
		White LED Bulb / Clear Lens	P2ASL7LB(S)-3PSRL
		Yellow LED Bulb / Yellow Lens	P2ASL8LB-3PSRL
	Please mention the voltage required after the ordering code		
	Momentary / Stayput	White LED Bulb / White Lens	P2ASL1LB(S)-3PSRR
	LED Bulb BA9S type	Green LED Bulb / Green Lens	P2ASL3LB-3PSRR
	24V AC/DC,	Red LED Bulb / Red Lens	P2ASL4LB-3PSRR
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	P2ASL5LB-3PSRR
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	P2ASL6LB-3PSRR
		White LED Bulb / Clear Lens	P2ASL7LB(S)-3PSRR
		Yellow LED Bulb / Yellow Lens	P2ASL8LB-3PSRR
	Please mention the voltage required after the ordering code		
	Momentary / Stayput	White LED Bulb / White Lens	P2ASL1LB(S)-3PSRR
	LED Bulb BA9S type	Green LED Bulb / Green Lens	P2ASL3LB-3PSRR
	24V AC/DC,	Red LED Bulb / Red Lens	P2ASL4LB-3PSRR
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	P2ASL5LB-3PSRR
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	P2ASL6LB-3PSRR
		White LED Bulb / Clear Lens	P2ASL7LB(S)-3PSRR
		Yellow LED Bulb / Yellow Lens	P2ASL8LB-3PSRR
	Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

TWIN ILLUMINATED ACTUATORS WITH FILAMENT BULB			
	Type	COLOUR	ORDERING CODE
	Twin Illuminated 1 Flush, 1 Projecting (IO) Mark		
			
	Filament Bulb	Red	P2ATL5 F3F4 (IO)
	6V to 130V AC/DC	Green	
		Amber Lens	
Direct Connection	Please mention the voltage required after the ordering code		
			
	Filament Bulb	Red	P2ATLR5 F3F4 (IO)
	24V,48V,130V,230V AC/DC	Green	
		Amber Lens	
Connection with Resistor	Please mention the voltage required after the ordering code		
	Twin Illuminated Double Flush, (IO) Mark		
			
	Filament Bulb	Red	P2ATL5 F3F4 (IO)
	6V to 130V AC/DC	Green	
		Amber Lens	
Direct Connection	Please mention the voltage required after the ordering code		
			
	Filament Bulb	Red	P2ATLR5 F3F4 (IO)
	24V,48V,130V,230V AC/DC	Green	
		Amber Lens	
Connection with Resistor	Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø PLASTIC SERIES

TWIN ILLUMINATED ACTUATORS WITH LED			
	TYPE	COLOUR	ORDERING CODE
	Twin Illuminated 1 Flush, 1 Projecting, (IO) Mark		
			
	Integral LED	Green	P2ATLR5L F3P4 (IO)
	6V, 12V, 24V, 48V AC/DC	Red	
	110VAC, 110VDC,	Amber Lens / Amber LED	
	230VAC, 220VDC		
Integral LED	Please mention the voltage required after the ordering code		
			
	LED Bulb, BA9S type	Green	P2ATLR5LB F3P4 (IO)
	24V AC/DC,	Red	
	110VAC, 110VDC	Amber Lens / Amber LED	
	230VAC, 220VDC		
LED Bulb	Please mention the voltage required after the ordering code		
	Twin Illuminated Double Flush, (IO) Mark		
			
	Integral LED	Green	P2ATLR5L F3P4 (IO)
	6V, 12V, 24V, 48V AC/DC	Red	
	110VAC, 110VDC,	Amber Lens / Amber LED	
	230VAC, 220VDC		
Integral LED	Please mention the voltage required after the ordering code		
			
	LED Bulb, BA9S type	Green	P2ATLR5LB F3P4 (IO)
	24V AC/DC,	Red	
	110VAC, 110VDC	Amber Lens / Amber LED	
	230VAC, 220VDC		
LED Bulb	Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø PLASTIC SERIES

PILOT LIGHTS WITH BULB			
	TYPE	COLOUR	ORDERING CODE
PILOT LIGHTS WITH FILAMENT BULB			
		White	P2PLB1
	Filament Bulb	Green	P2PLB3
	6V to 130V AC/DC	Red	P2PLB4
		Amber	P2PLB5
		Blue	P2PLB6
		Clear	P2PLB7
		Yellow	P2PLB8
Direct Connection	Please mention the voltage required after the ordering code		
		White	P2PLBR1
	Fil. Bulb	Green	P2PLBR3
	24V,48V,130V,230V AC/DC	Red	P2PLBR4
		Amber	P2PLBR5
		Blue	P2PLBR6
		Clear	P2PLBR7
		Yellow	P2PLBR8
Connection with Resistor	Please mention the voltage required after the ordering code		
		White	P2PLBR1240AC
	Filament bulb	Green	P2PLBR3240AC
	230 V AC	Red	P2PLBR4240AC
		Amber	P2PLBR5240AC
		Blue	P2PLBR6240AC
		Clear	P2PLBR7240AC
		Yellow	P2PLBR8240AC
Connection with Resistor + Diode			
	Filament bulb		
	Pri. Volt.	Sec. Volt.	White
	110VAC	06	Green
	110VAC	12	Red
	110VAC	24	Amber
	Pri. Volt.	Sec. Volt.	Blue
	240VAC	06	Clear
	240VAC	12	Yellow
	240VAC	24	
Connection with Transformer			XXX - Primary Voltage
			YY - Secondary Voltage

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

PILOT LIGHTS			
	TYPE	Colour of LED / Lens	ORDERING CODE
	Pilot Light with Integral LED		
	Integral LED	White LED / White Lens	P2PLBR1L(S)
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	P2PLBR3L
	110VAC, 110VDC,	Red LED / Red Lens	P2PLBR4L
	230VAC, 220VDC	Amber LED / Amber Lens	P2PLBR5L
		Blue LED / Blue Lens	P2PLBR6L
		White LED / Clear Lens	P2PLBR7L(S)
		Yellow LED / Yellow Lens	P2PLBR8L
Integral LED	Please mention the voltage required after the ordering code		
	Integral LED, Flasher	White LED Bulb / White Lens	P2PLBR1LF(S)
	24V, 110V, 230V, AC	Green LED Bulb / Green Lens	P2PLBR3LF
		Red LED Bulb / Red Lens	P2PLBR4LF
		Amber LED Bulb / Amber Lens	P2PLBR5LF
		Blue LED Bulb / Blue Lens	P2PLBR6LF
		White LED Bulb/ Clear Lens	P2PLBR7LF(S)
		Yellow LED Bulb / Yellow Lens	P2PLBR8LF
Integral LED	Please mention the voltage required after the ordering code		
	Integral LED	White LED / White Lens	P2PLBR1LU(S)
	24V upto 240V AC/DC	Green LED / Green Lens	P2PLBR3LU
		Red LED / Red Lens	P2PLBR4LU
		Amber LED / Amber Lens	P2PLBR5LU
		Blue LED / Blue Lens	P2PLBR6LU
		White LED / Clear Lens	P2PLBR7LU(S)
		Yellow LED / Yellow Lens	P2PLBR8LU
Integral LED, Universal	Please mention the voltage required after the ordering code		
			
	Integral LED	White LED / White Lens	P2PLBR1L(S)
	415VAC	Green LED / Green Lens	P2PLBR3L
		Red LED / Red Lens	P2PLBR4L
		Amber LED / Amber Lens	P2PLBR5L
		Blue LED / Blue Lens	P2PLBR6L
		White LED / Clear Lens	P2PLBR7L(S)
		Yellow LED / Yellow Lens	P2PLBR8L
Integral LED, 415VAC	Please mention the voltage required after the ordering code		
	Integral LED, Test Lamp	White LED / White Lens	P2PLBR1L(S)**TL
	24V AC/DC	Green LED / Green Lens	P2PLBR3L**TL
	110VAC, 110VDC,	Red LED / Red Lens	P2PLBR4L**TL
	230VAC, 220VDC	Amber LED / Amber Lens	P2PLBR5L**TL
		Blue LED / Blue Lens	P2PLBR6L**TL
		White LED / Clear Lens	P2PLBR7L(S)**TL
		Yellow LED / Yellow Lens	P2PLBR8L**TL
Integral LED, Test Lamp	** Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø
PLASTIC SERIES

PILOT LIGHTS				
	TYPE		Colour of LED / Lens	ORDERING CODE
	Pilot Light with LED Bulb			
	LED Bulb, BA9S type		White LED Bulb / White Lens	P2PLB1LB(S)
	24V AC/DC,		Green LED Bulb / Green Lens	P2PLB3LB
	110VAC, 110VDC		Red LED Bulb / Red Lens	P2PLB4LB
	230VAC, 220VDC		Amber LED Bulb / Amber Lens	P2PLB5LB
			Blue LED Bulb / Blue Lens	P2PLB6LB
			White LED Bulb / Clear Lens	P2PLB7LB(S)
			Yellow LED Bulb / Yellow Lens	P2PLB8LB
LED Bulb	Please mention the voltage required after the ordering code			
	LED Bulb			
	Pri. Volt.	Sec. Volt.	White LED Bulb / White Lens	P2PLB1LB(S) XXX / YY
	110VAC	06	Green LED Bulb / Green Lens	P2PLB3LB XXX / YY
	110VAC	12	Red LED Bulb / Red Lens	P2PLB4LB XXX / YY
	110VAC	24	Amber LED Bulb / Amber Lens	P2PLB5LB XXX / YY
	Pri. Volt.	Sec. Volt.	Blue LED Bulb / Blue Lens	P2PLB6LB XXX / YY
	240VAC	06	White LED Bulb / Clear Lens	P2PLB7LB(S) XXX / YY
	240VAC	12	Yellow LED Bulb / Yellow Lens	P2PLB8LB XXX / YY
	240VAC	24		
Connection with			XXX - Primary Voltage	
Transformer			YY - Secondary Voltage	

TEKNIC

Control & Signalling Devices 22.5 Ø

PLASTIC SERIES

LED PILOT LIGHTS ECONOMY SERIES

	Type	Colour of LED / Lens	ORDERING CODE
	Integral LED		
	6V, 12V, 24V, 48V AC/DC	White LED / White Lens	3PLBR1L(S)
	110VAC, 110VDC,	Green LED / Green Lens	3PLBR3L
	230VAC, 220VDC	Red LED / Red Lens	3PLBR4L
		Amber LED / Amber Lens	3PLBR5L
		Blue LED / Blue Lens	3PLBR6L
		White LED / Clear Lens	3PLBR7L(S)
		Yellow LED / Yellow Lens	3PLBR8L
	Please mention the voltage required after the ordering code		
	Integral LED	White LED / White Lens	3PLBR1LU(S)
	24V upto 240V AC/DC	Green LED / Green Lens	3PLBR3LU
		Red LED / Red Lens	3PLBR4LU
		Amber LED / Amber Lens	3PLBR5LU
		Blue LED / Blue Lens	3PLBR6LU
		White LED / Clear Lens	3PLBR7LU(S)
		Yellow LED / Yellow Lens	3PLBR8LU
	Please mention the voltage required after the ordering code		
	Integral LED, Dual colour		
	24VAC	Green LED	
	110VAC	Red LED	3PLBR34L
	230VAC	White Lens	
	Integral LED with Buzzer		
	24VAC		
	110VAC	Red LED	3PLBR4LBZ
	230VAC		
	Please mention the voltage required after the ordering code		

TEKNIC

Control & Signalling Devices 22.5 Ø METALLIC SERIES

CONTACT ELEMENTS		
	TYPE	ORDERING CODE
	PANEL MOUNTING	
	NORMALLY OPEN (NO)	S1
	SILVER CONTACT	
	NORMALLY OPEN (NO)	S1S
	SILVER CONTACT	
	(BREAK BEFORE MAKE)	
	NORMALLY OPEN (NO)	S1E
	SILVER CONTACT	
	(MAKE BEFORE BREAK)	
	NORMALLY CLOSED (NC)	S2
	SILVER CONTACT	
	NORMALLY OPEN (NO)	S3
	GOLD CONTACT	
	NORMALLY CLOSED (NC)	S4
	GOLD CONTACT	
	BASE MOUNTING	
	NORMALLY OPEN (NO)	S5
	SILVER CONTACT	
	NORMALLY CLOSED (NC)	S6
	SILVER CONTACT	
	NORMALLY OPEN (NO)	S7
	GOLD CONTACT	
	NORMALLY CLOSED (NC)	S8
	GOLD CONTACT	

Common types of control and signalling devices Ø 22.5 P series

Description	Type of Actuator or Lense Assembly	Colour of Actuator or Lense	Contact Elements NO = S1 NC = S2 or Lamp Holder	Type of complete Control or Signalling Device
Flush Pushbutton	P2AF3	Green	1NO	P2PSF310
	P2AF8	Yellow	2NO+1NC	P2PSF821
Projecting Pushbutton	P2AP2	Black	2NC	P2PSP202
	P2AP4	Red	3NO+3NC	P2PSP433
Booted Pushbutton	P2AB3BT7	Green	2NO	P2PSB3BT720
	P2AB4BT7	Red	2NC	P2PSB4BT702
Mushroom Pushbutton Spring return	P2AM2	Black	1NO+1NC	P2PSM211
	P2AM4	Red	1NC	P2PSM401
Mushroom Pushbutton latching turn to release	P2AML2	Black	1NC	P2PSML201
	P2AML4	Red	2NO+2NC	P2PSML422
Mushroom Pushbutton latching, key to release	P2AMLKB4	Red	1NO+1NC	P2PSMLKB411
Selector Actuator(2 Pos)	P2AS2-2P	Black	1NO	P2PSS210-2P
Selector Actuator(3 Pos)	P2AS2-3P	Black	1NO+1NC	P2PSS211-3P
Key Actuator (2 Pos), key removable in both positions	P2AK2-2PB		1NO	P2PSK210-2PB
Key Actuator (3 Pos), key removable in left & right positions	P2AK2-3PB		1NO+1NC	P2PSK211-3PB
Twin Pushbutton marked "I O"	P2ATF2-F4-IO	Flush-Black	1 NO	P2PSTF210-F401-IO
		Flush-Red	1 NC	
Twin Pushbutton not marked	P2ATF3-P4	Flush-Green	1NO+1NC	P2PSTF311-P411
		Proj-Red	1NO+1NC	
Flush Illuminated Pushbutton with integral LED for 24V DC	P2ALRF3L24DC	Green	1NO+1NC	P2PSLRF3L1124DC
Projecting Illuminated Pushbutton with integral LED for 230V AC	P2ALRP4L230AC	Red	1NO+1NC	P2PSLRP4L11230AC
Twin Luminous Pushbutton marked "I O"	P2ATL3-F2-F4 IO130	Lense-Green	1 NO + 1 NC	P2PSTL3F211-F401-IO130
		Flush-Black		
Flush - Flush direct connection (130V)		Flush-Red	1 NC	
Twin Luminous Pushbutton not marked	P2ATLR5-F3-P4230	Lense-Amber	1 NO	P2PSTLR5F310-P401 230
		Flush-Green		
Flush - Projecting with resistance and (230AC)		Proj.-Red	1 NC	
Pilot Light for direct connection upto 130V	P2PLLA3	Green	2LHB130	P2PLB3130
	P2PLLA4	Red	2LHB130	2PLPB4130
Pilot Light through resistor and diode for 230 V AC. Bulb:130 V.	P2PLLA5	Amber	2LHBR230 AC	P2PLBR5230AC
	P2PLLA6	Blue	2LHBR230 AC	P2PLBR6230AC
Pilot Light with transformer for 230 V Bulb:24 V.	P2PLLA4	Red	2LHBT230/24	P2PLBT4230/24
	P2PLLA3	Green	2LHBT230/24	P2PLBT3230/24
Pilot Light with LED bulb for 110V AC Bulb: 110V	P2PLLA5	Amber	2LHLB110	P2PLB5LB110
Pilot light economy type with integral LED for 220 DC	—	White	—	3PLBR1L220DC

