

Price list

Low Voltage Switchgear and Controlgear Products

Effective 1st February, 2021

World Class Solutions for Circuit Protection and Controls



EAT•N

Powering Business Worldwide

MOELLER is now **EAT•N**

About **EAT•N**


Eaton is a global leading power management company headquartered in USA, serving customers across the world. Our proven technologies enable customers to generate more power using fewer resources, answering the demands of today's fast changing world. Eaton products and services provide the power inside thousands of products and projects – from energy efficient buildings, cities, infrastructure to next generation aircraft, cars, trucks and machines. Eaton is a Fortune 500 company recognized amongst the most admired firms in our industry.

Eaton Power Quality Private Limited, India, is a 100% subsidiary and a part of electrical sector of Eaton Corporation. We are catering to every industrial segment with versatile solutions which includes Switchgear: LV & MV Solutions, Fusegear: LV & MV solutions, UPSs and software solutions.



The Fusion Of Our Heritage

Meeting power management needs around the world

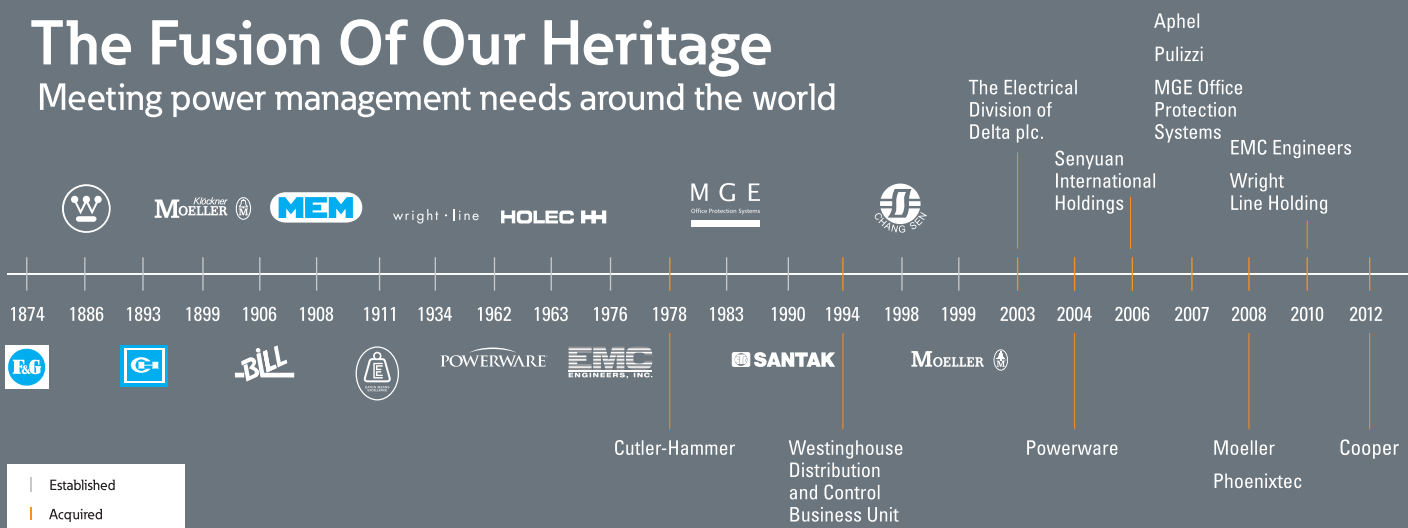

Toll free number: **1800 425 5758, 1800 102 4620** Emergency number : **893 922 2522**

✉ helpdeskelectrical@eaton.com

Eaton's Product Range

Low Voltage Distribution Products

<i>Air Circuit Breakers</i>	<i>PSL / IZMX</i>
<i>Molded Case Circuit Breakers</i>	<i>PDC / NZM / BZM</i>
<i>Disconnectors</i>	<i>P / PN</i>
<i>Mining Duty Breakers</i>	
<i>ATS</i>	



Contactors

<i>Mini Contactors & Control Relays</i>	<i>DILEM / DILER / DILEEM</i>
<i>Control Relays & Power Contactors</i>	<i>DILM / DILA</i>
<i>Vacuum Contactors</i>	<i>DILM / DILH /V201</i>
<i>4 Pole Contactors</i>	<i>DILMP</i>
<i>Capacitor Duty Contactors</i>	<i>DILK</i>
<i>Lighting Duty Contactors</i>	<i>DILL</i>
<i>DC Mill Duty Contactors</i>	
<i>DC Power Contactors</i>	
<i>Definite Purpose Contactors</i>	



Overload Relays

<i>Thermal Magnetic Overload Relay</i>	<i>ZB/ZE/ZEB</i>
<i>Electronic Overload Relay</i>	<i>Motor Insight, C440</i>
<i>Thermistor Based Overload Relays</i>	<i>EMT6</i>



Motor Protection Circuit Breakers (MPCB)

<i>MPCB with Push Button Control</i>	<i>PKZM01</i>
<i>MPCB with Rotary Handle Control</i>	<i>PKZM0</i>
<i>MPCB with Electronic Release</i>	<i>PKE</i>



Low Voltage Control Products

<i>Pilot Devices (22.5mm & 16mm)</i>	<i>RMQTitan (M22) / A22</i>
<i>Pilot Devices (30.5mm)</i>	<i>E30/E34/10250T</i>
<i>Foot & Palm Switch</i>	<i>FAK</i>
<i>Signal Towers</i>	<i>SL</i>
<i>Pressure Switches</i>	<i>MCS</i>
<i>Position Switches / Safety Switches</i>	<i>LS</i>
<i>Sensors</i>	<i>Inductive / Capacitive / Optical</i>
<i>Limit Switches</i>	<i>Precision / Mini / Metal / Metal-IP67</i> <i>/ Hazardous Applications</i>



Effective 1st February, 2021

Eaton's Product Range

Cam Switches 8 Switch - Disconnectors

Cam Switches upto 132KW.....	T
Switch-Disconnecter upto 110KW/315A	P
ATEX Rated Enclosures	T/P



Electronic Relays

Safety Relay	ESR5
Safety Control Relays	Easy Safety
Timing Relays	ETR2 / ETR4
Measuring & Monitoring Relays	EMR



Automation Products

Relays	Easy500/700/800
PLC's	XC / EC4
HMI/ HMI-PLC's	XVC
Smartwire Darwin Communication System	



Motor Starters

DOL / RDOL Starter upto 32A with PKZM0	
DOL / RDOL Starter upto 32A with PKE	
Soft Starters upto 900KW.....	S8014/S8114
Variable Speed Starter	DE1
Variable Speed Drive	DG1



Enclosures

IP65, Outdoor rated Polycarbonate Opaque/Transparent	CI/CI-K
MCB Individual Enclosure	AE...
MCCB / Switch Disconnecter	MCCB...
Fuse Enclosure	RS..



Solar Products

Disconnectors upto 60A, 1000V DC rated	
Disconnectors, 160A - 1400A, 1500V DC rated	
Fuse & Fuse Base, 1000V DC	
Inverters upto 1MW	
DC Combiner Boxes	
AC Switchgear	



Effective 1st February, 2021



CONTENTS

Switchgear

Air Circuit Breakers.....	06
Molded Case Circuit Breakers NZM Series.....	07-10
Molded Case Circuit Breakers BZM Series.....	10
Switch Disconnecter PN Series.....	10
MCCB Accessories.....	11-13

Contactors

Mini Contactors, DILEM- AC/ DC Operated.....	14
Mini Control Relays, DILER-AC/DC Operated.....	14
Power Contactor – AC Operated, 3 Pole.....	15-17
Power Contactor – DC Operated, 3 Pole.....	15-17
Control Relays, DILA -AC/DC Operated.....	15-17
Vacuum Contactors, DILM.....	18
Capacitor Duty Contactors types DILK.....	18
4 Pole Contactors type DILMP.....	19
Accessories for Contactors type DILM/DILA/DILMP.....	20-21

MPCB's

MPCB, push button control, PKZM01.....	22
MPCB, Rotary Handle Operated, PKZM0.....	22
Accessories.....	23

Overload Relays

Thermal Overload Relays, ZE, ZB.....	24-25
--------------------------------------	-------

Type 2 Coordination Tables.....	26
--	-----------

For prices of other products, please contact Eaton.



- Confirms to IEC 60947-2
- Ratings: 800A to 4000A
- 55kA and 66kA, Ics=Icu=Icw (1sec) upto 690V
- Frame Size: Frame1: 800A to 2000A
Frame 2: 2500A to 4000A
- ETU available in LSI, LSIG with LED and LCD Display, Current Metering, Voltage & Power Monitoring

Standard Breaking Capacity Ics=Icu=Icw=55kA; ETU with LSIG, LCD display and Current Metering.

Also available with higher breaking capacity Ics=Icu=Icw=66kA

Frame Size	Rating (A)	Type	3 Pole		4 Pole		
			Part No.	MRP.	Part No.	MRP.	
Draw-Out ACB							
I	800A	MDO	PSL5083DENGGVNSMRNN4NWNNX	221000	PSL5084DENGGVNSMRNN4NWNNX	274040	
		EDO	PSL5083DENGGVNSRRNN4NWNNX	272000	PSL5084DENGGVNSRRNN4NWNNX	325040	
	1000A	MDO	PSL5103DENGGVNSMRNN4NWNNX	227240	PSL5104DENGGVNSMRNN4NWNNX	278720	
		EDO	PSL5103DENGGVNSRRNN4NWNNX	278240	PSL5104DENGGVNSRRNN4NWNNX	329720	
	1250A	MDO	PSL5123DENGGVNSMRNN4NWNNX	249600	PSL5124DENGGVNSMRNN4NWNNX	310440	
		EDO	PSL5123DENGGVNSRRNN4NWNNX	300600	PSL5124DENGGVNSRRNN4NWNNX	361440	
	1600A	MDO	PSL5163DENGGVNSMRNN4NWNNX	270400	PSL5164DENGGVNSMRNN4NWNNX	322400	
		EDO	PSL5163DENGGVNSRRNN4NWNNX	321400	PSL5164DENGGVNSRRNN4NWNNX	373400	
	2000A	MDO	PSL5203DENGGVNSMRNN4NWNNX	327600	PSL5204DENGGVNSMRNN4NWNNX	390000	
		EDO	PSL5203DENGGVNSRRNN4NWNNX	378600	PSL5204DENGGVNSRRNN4NWNNX	441000	
	II	2500A	MDO	PSL5253DENGGVNSMRNNANWNNX	395200	PSL5254DENGGVNSMRNNANWNNX	478400
			EDO	PSL5253DENGGVNSRRNNANWNNX	446200	PSL5254DENGGVNSRRNNANWNNX	529400
3200A		MDO	PSL5323DENGGVNSMRNNANWNNX	478920	PSL5324DENGGVNSMRNNANWNNX	582920	
		EDO	PSL5323DENGGVNSRRNNANWNNX	529920	PSL5324DENGGVNSRRNNANWNNX	633920	
4000A		MDO	PSL5403DENGGVNSMRNNANWNNX	582400	PSL5404DENGGVNSMRNNANWNNX	738400	
		EDO	PSL5403DENGGVNSRRNNANWNNX	633400	PSL5404DENGGVNSRRNNANWNNX	789400	
Fixed ACB							
I	800A	MF	PSL5083FENGGVNSMRNN4NWNNX	177320	PSL5084FENGGVNSMRNN4NWNNX	216320	
		EF	PSL5083FENGGVNSRRNN4NWNNX	228320	PSL5084FENGGVNSRRNN4NWNNX	267320	
	1000A	MF	PSL5103FENGGVNSMRNN4NWNNX	187720	PSL5104FENGGVNSMRNN4NWNNX	228800	
		EF	PSL5103FENGGVNSRRNN4NWNNX	238720	PSL5104FENGGVNSRRNN4NWNNX	279800	
	1250A	MF	PSL5123FENGGVNSMRNN4NWNNX	208520	PSL5124FENGGVNSMRNN4NWNNX	253760	
		EF	PSL5123FENGGVNSRRNN4NWNNX	259520	PSL5124FENGGVNSRRNN4NWNNX	304760	
	1600A	MF	PSL5163FENGGVNSMRNN4NWNNX	221000	PSL5164FENGGVNSMRNN4NWNNX	269360	
		EF	PSL5163FENGGVNSRRNN4NWNNX	272000	PSL5164FENGGVNSRRNN4NWNNX	320360	
	2000A	MF	PSL5203FENGGVNSMRNN4NWNNX	245440	PSL5204FENGGVNSMRNN4NWNNX	317720	
		EF	PSL5203FENGGVNSRRNN4NWNNX	296440	PSL5204FENGGVNSRRNN4NWNNX	368720	
	II	2500A	MF	PSL5253FENGGVNSMRNNANWNNX	296400	PSL5254FENGGVNSMRNNANWNNX	371280
			EF	PSL5253FENGGVNSRRNNANWNNX	347400	PSL5254FENGGVNSRRNNANWNNX	422280
3200A		MF	PSL5323FENGGVNSMRNNANWNNX	421200	PSL5324FENGGVNSMRNNANWNNX	510120	
		EF	PSL5323FENGGVNSRRNNANWNNX	472200	PSL5324FENGGVNSRRNNANWNNX	561120	
4000A		MF	PSL5403FENGGVNSMRNNANWNNX	515320	PSL5404FENGGVNSMRNNANWNNX	636480	
		EF	PSL5403FENGGVNSRRNNANWNNX	566320	PSL5404FENGGVNSRRNNANWNNX	687480	

Standard Accessories included for Draw-out ACB: Safety shutter, Door sealing frame, Trip signalling contact, Auxiliary contacts 4NO+ 4NC, Horizontal terminals, ETU LSIG with LCD Display, Current Metering. Additionally for Electrically Operated ACB: Motor operated mechanism, with mechanical and electrical closing, motor and closing coil of 220-240V AC/DC and shunt trip of 220-240V AC/DC.

ACB Type	Price Variation in MRP	Part code digit 12&13 (GV) to replace with
For Switch Disconnecter	Reduce ₹25000	NN
For LCD Display with Current & Voltage Metering	Add ₹28000	GU

Other option, to be specified at the time of ordering:

1. U/V release (at extra price)
2. Voltage rating for Trip Unit, Shunt Trip, Motor Operator and Closing Coil
3. Remote reset requirement (at extra price)
4. LCS (ready to close signal switch)
5. Protection required (LSI, LSIG with source grounding) - (at differential price)
6. Door Interlock (Left side / Right side)
7. Counter, Mechanical interlock
8. Rear terminal: Horizontal / Vertical


Note:

1. Refer catalogue for detailed order booking sheet
2. * Please contact nearest sales office for information on prices of 5000A and 6300A ACB, higher breaking capacity, 690V requirement & additional accessories.

Effective 1st February, 2021

Circuit-breakers, switch-disconnectors

System overview

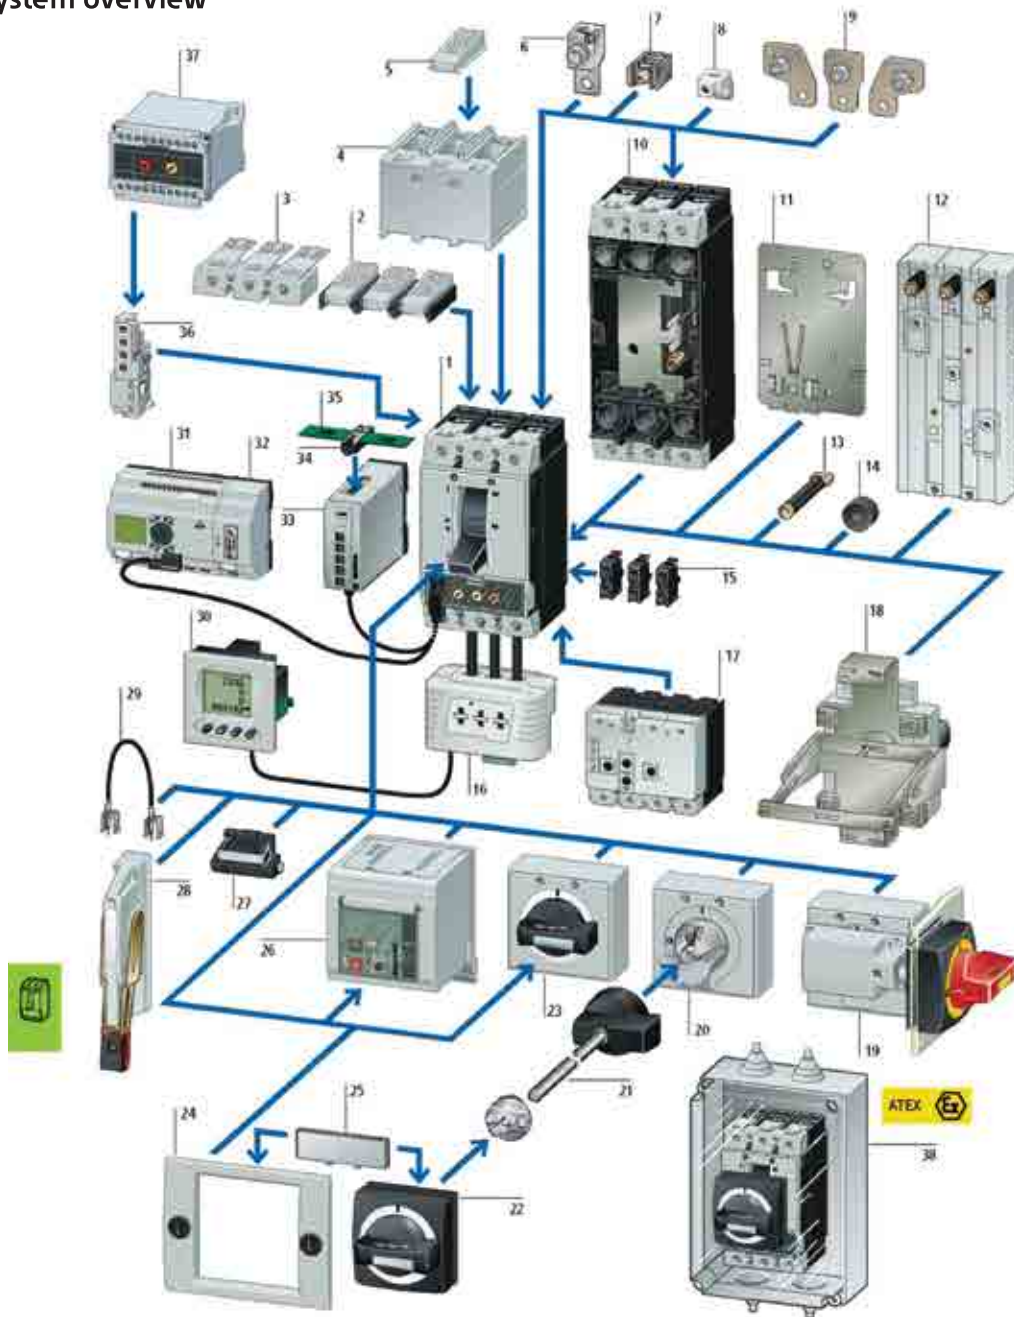




- | | |
|---|---|
| <ol style="list-style-type: none"> 1. Switch-Disconnecter; circuit breaker; Molded case switches 2. IP2X Protection against contact with a finger 3. Terminal cover, knockout 4. Terminal cover 5. IP2X protection against contact with a finger 6. Tunnel terminals 7. Box terminals 8. Control circuit terminal 9. Connection width extension 10. Plug-in and withdrawable unit 11. Adapter plate 12. Busbar adapter 13. Connecting on rear 14. Spacer 15. Standard auxiliary contacts, trip – indicating auxiliary switches 16. Measuring and communication modules 17. Residual-current protection device 18. Rear operator | <ol style="list-style-type: none"> 19. Main switch rotary handle for side panel mounting 20. Door coupling rotary 21. Extension Shaft 22. Handle 23. Rotary handle 24. Insulating surround 25. External warning plate/marketing plate 26. Remote Operator 27. Toggle lever interlock device 28. Side Operator handle 29. Mechanical Interlock 30. Display 31. BreakerVisu Display 32. NZM communication module for SmartWire-DT 33. Voltage release/Early-make auxiliary contact 34. Delay unit for undervoltage releases 35. Insulated enclosures |
|---|---|



Effective 1st February, 2021

NZM with Thermal magnetic Trip Unit

- Global Approvals: IEC, UL, CSA, Shipping
- Energy Monitoring module with communication and/or panel front display
- Special Versions : 1000V AC and upto 1500V DC
- ClassII Front Face
- Thermal Magnetic Trip Unit:
 - Adjustable Thermal : 0.8 - 1.0 In
 - Adjustable Magnetic : 6 - 10 Ir
- Withdrawable, Plug In & Motorized options
- Ics = 100% Icu




	Rated current(A)	Breaking Capacity (KA) Icu, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	20	25	NZMB1-A20	280987	9095	NZMB1-4-A20	281237	12305
	25		NZMB1-A25	280988	9095	NZMB1-4-A25	281239	12305
	32		NZMB1-A32	280989	9095	NZMB1-4-A32	281241	12305
	40		NZMB1-A40	259075	9095	NZMB1-4-A40	265799	12305
	50		NZMB1-A50	259076	9095	NZMB1-4-A50	265801	12305
	63		NZMB1-A63	259077	9095	NZMB1-4-A63	265803	12305
	80		NZMB1-A80	259078	9095	NZMB1-4-A80	265805	12305
	100		NZMB1-A100	259079	9095	NZMB1-4-A100	265807	12305
	125		NZMB1-A125	259080	12935	NZMB1-4-A125	265809	19040
	160		NZMB1-A160	281230	14250	NZMB1-4-A160	281243	19775
	200		NZMB2-A200	259089	21170	NZMB2-4-A200	265852	28560
	250		NZMB2-A250	259090	22400	NZMB2-4-A250	265855	29680
	300		NZMB2-A300	107518	25200	NZMB2-4-A300	107582	33000
			20	36	NZMC1-A20	283293	10790	NZMC1-4-A20
25		NZMC1-A25	283294		10790	NZMC1-4-A25	283302	13625
32		NZMC1-A32	283295		10790	NZMC1-4-A32	283304	13625
40		NZMC1-A40	271392		10790	NZMC1-4-A40	271408	13625
50		NZMC1-A50	271393		10790	NZMC1-4-A50	271410	13625
63		NZMC1-A63	271394		10790	NZMC1-4-A63	271412	13625
80		NZMC1-A80	271395		11990	NZMC1-4-A80	271414	13625
100		NZMC1-A100	271396		11990	NZMC1-4-A100	271416	13625
125		NZMC1-A125	271397		16895	NZMC1-4-A125	271418	19620
160		NZMC1-A160	283296		17985	NZMC1-4-A160	283306	20710
200		NZMC2-A200	271422		25680	NZMC2-4-A200	271435	29960
250		NZMC2-A250	271423		26750	NZMC2-4-A250	271438	32100
300		NZMC2-A300	107519		28340	NZMC2-4-A300	107584	35970
		20	50		NZMN1-A20	281231	12980	NZMN1-4-A20
	25	NZMN1-A25		281232	12980	NZMN1-4-A25	281247	18290
	32	NZMN1-A32		281233	12980	NZMN1-4-A32	281249	17110
	40	NZMN1-A40		259081	12980	NZMN1-4-A40	265811	17110
	50	NZMN1-A50		259082	12980	NZMN1-4-A50	265813	17110
	63	NZMN1-A63		259083	12980	NZMN1-4-A63	265815	17110
	80	NZMN1-A80		259084	12980	NZMN1-4-A80	265817	17110
	100	NZMN1-A100		259085	12980	NZMN1-4-A100	265819	17110
	125	NZMN1-A125		259086	17985	NZMN1-4-A125	265821	22420
	160	NZMN1-A160		281234	18530	NZMN1-4-A160	281251	23600
	200	NZMN2-A200		259093	27250	NZMN2-4-A200	265863	32155
	250	NZMN2-A250		259094	28340	NZMN2-4-A250	265866	34335
	300	NZMN2-A300		107580	29975	NZMN2-4-A300	107586	38150
	320	NZMN3-A320		109669	41420	NZMN3-4-A320	109694	53410
	400	NZMN3-A400		109670	43055	NZMN3-4-A400	109696	55045
	500	NZMN3-A500		109671	45780	NZMN3-4-A500	109698	57225

■ For UL, CSA part numbers - Please contact nearest sales office
 ■ Ready Stock

	Rated current(A)	Breaking Capacity (KA) Icu, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	20	100	NZMH1-A20	284376	16350	NZMH1-4-A20	284416	20710
	25		NZMH1-A25	284377	16350	NZMH1-4-A25	284418	20710
	32		NZMH1-A32	284378	16350	NZMH1-4-A32	284420	20710
	40		NZMH1-A40	284379	16350	NZMH1-4-A40	284422	20710
	50		NZMH1-A50	284410	16350	NZMH1-4-A50	284424	20710
	63		NZMH1-A63	284411	16350	NZMH1-4-A63	284426	20710
	80		NZMH1-A80	284412	16350	NZMH1-4-A80	284428	20710
	100		NZMH1-A100	284413	16350	NZMH1-4-A100	284430	20710
	125		NZMH1-A125	284414	19620	NZMH1-4-A125	284432	24525
	160		NZMH1-A160	284415	20710	NZMH1-4-A160	284434	24525
			20	150	NZMH2-A20	281281	27250	NZMH2-4-A20
25		NZMH2-A25	281282		27250	NZMH2-4-A25	281289	35425
32		NZMH2-A32	281283		27250	NZMH2-4-A32	281291	35425
40		NZMH2-A40	259095		27250	NZMH2-4-A40	265823	35425
50		NZMH2-A50	259096		27250	NZMH2-4-A50	265825	35425
63		NZMH2-A63	259097		27250	NZMH2-4-A63	265827	35425
80		NZMH2-A80	259098		27250	NZMH2-4-A80	265829	35425
100		NZMH2-A100	259099		27250	NZMH2-4-A100	265831	35425
125		NZMH2-A125	259100		27250	NZMH2-4-A125	265833	35425
160		NZMH2-A160	259101		27250	NZMH2-4-A160	265871	35425
200		NZMH2-A200	259102		29430	NZMH2-4-A200	265874	36515
250		NZMH2-A250	259103		33245	NZMH2-4-A250	265877	42510
300		NZMH2-A300	107581		36515	NZMH2-4-A300	107588	44690
320		NZMH3-A320	109673		43600	NZMH3-4-A320	109700	55590
400		NZMH3-A400	109674		44690	NZMH3-4-A400	109702	57225
500		NZMH3-A500	109675		49050	NZMH3-4-A500	109704	59950

NZM with Microprocessor Based Trip Unit Type AE

- Global Approvals: IEC, UL, CSA, Shipping
- On board Diagnostics as standard
- Complete suite of communication solutions-Modbus/Profibus/Ethernet/SWD
- Energy Monitoring module with communication and/or panel front display
- Special Versions: 1000V AC and upto 1500V DC
- Microprocessor based Trip Unit:
 - Adjustable Thermal : 0.5 - 1.0 In
 - Adjustable Magnetic : 2 - 12 In
 - Overload Pre Alarm LED
- Withdrawable, Plug In & Motorized options
- Ics = 100% Icu




	Rated current(A)	Breaking Capacity (KA) Icu, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
Normal Switching Capacity								
	400	50	NZMN3-AE400	259114	42560	NZMN3-4-AE400	265891	59248
	630		NZMN3-AE630	259115	44800	NZMN3-4-AE630	265894	62160
	800		NZMN4-AE800	265759	86135	NZMN4-4-AE800	265909	108284
	1000		NZMN4-AE1000	265760	100625	NZMN4-4-AE1000	265912	145475
	1250		NZMN4-AE1250	265761	118496	NZMN4-4-AE1250	265915	180320
	1600		NZMN4-AE1600	265762	161000	NZMN4-4-AE1600	265918	207000
High Switching Capacity								
	400	150	NZMH3-AE400	259117	49280	NZMH3-4-AE400	265897	72800
	630	NZMH3-AE630	259118	52080	NZMH3-4-AE630	265900	80640	
	800	85	NZMH4-AE800	265764	103040	NZMH4-4-AE800	265921	128800
	1000	NZMH4-AE1000	265765	128800	NZMH4-4-AE1000	265924	197120	
	1250	NZMH4-AE1250	265766	148120	NZMH4-4-AE1250	265927	206080	
	1600	NZMH4-AE1600	265767	190400	NZMH4-4-AE1600	265930	229600	
Earth Fault Protection								
	400	50	NZMN3-AE400-T	110889	64400	NZMN3-4-AE400-T	110902	72240
	630	NZMN3-AE630-T	110890	68880	NZMN3-4-AE630-T	110904	84000	
	400	150	NZMH3-AE400-T	110895	77280	NZMH3-4-AE400-T	110906	89040
	630	NZMH3-AE630-T	110896	80640	NZMH3-4-AE630-T	110908	95200	

■ For UL, CSA part numbers - Please contact nearest sales office
 ■ Ready Stock

Effective 1st February, 2021

NZM with Microprocessor Based Trip Unit Type VE


- Global Approvals: IEC, UL, CSA, Shipping
- On board Diagnostics as standard and Ics = 100% Icu
- Complete suite of communication solutions-Modbus/Profibus/Ethernet/SWD
- Energy Monitoring module with communication and/or panel front display
- Withdrawable, Plug IN & Motorized options
- Special Versions: 1000V AC and upto 1500V DC
- Microprocessor based Trip Unit:
 - Adjustable Overload Settings : 0.5 - 1.0 In
 - Adjustable Overload Time Delay Settings : 2 - 20 In
 - Adjustable Short Circuit Settings : 2 - 10 In
 - Adjustable Short Circuit Delay Settings : 0 - 1000ms
 - Adjustable Instantaneous Settings : 2 - 12 In
 - 12T- On/off function & Overload Pre Alarm LED

	Rated current(A)	Breaking Capacity (KA) Icu, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	100	50	NZMN2-VE100	259122	36400	NZMN2-4-VE100	265933	46480
	160		NZMN2-VE160	259123	36400	NZMN2-4-VE160	265935	46480
	250		NZMN2-VE250	259124	36400	NZMN2-4-VE250	265938	46480
	400		NZMN3-VE400	259132	45360	NZMN3-4-VE400	265957	62160
	630		NZMN3-VE630	259133	47600	NZMN3-4-VE630	265960	66640
	800		NZMN4-VE800	265769	96320	NZMN4-4-VE800	265975	123200
	1000		NZMN4-VE1000	265770	117600	NZMN4-4-VE1000	265978	179200
	1250		NZMN4-VE1250	265771	145600	NZMN4-4-VE1250	265981	212800
	1600		NZMN4-VE1600	265772	190400	NZMN4-4-VE1600	265984	252000
	100	150	NZMH2-VE100	259125	31360	NZMH2-4-VE100	265941	37520
	160		NZMH2-VE160	259126	34720	NZMH2-4-VE160	265943	42560
	250		NZMH2-VE250	259127	43120	NZMH2-4-VE250	265946	62720
	400		NZMH3-VE400	259135	50400	NZMH3-4-VE400	265963	72800
	630		NZMH3-VE630	259136	53200	NZMH3-4-VE630	265966	84000
	800	85	NZMH4-VE800	265774	113120	NZMH4-4-VE800	265987	134400
	1000		NZMH4-VE1000	265775	141680	NZMH4-4-VE1000	265990	201600
	1250		NZMH4-VE1250	265776	162400	NZMH4-4-VE1250	265993	240800
	1600		NZMH4-VE1600	265777	207200	NZMH4-4-VE1600	265996	263200

■ For UL, CSA part numbers - Please contact nearest sales office



Switch-Disconnectors Type PN

- Isolating Characteristic to IEC/EN 60947-3, VDE 0660
- Main switch characteristics including positive operation to IEC/EN 60204, VDE 0113

	Rated current(A)	3 Pole			4 Pole		
		Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	63	PN1-63	259140	7280	PN1-4-63	265999	10980
	100	PN1-100	259141	7280	PN1-4-100	266000	10980
	125	PN1-125	259142	7620	PN1-4-125	266001	11760
	160	PN1-160	281235	8400	PN1-4-160	281253	12320
	200	PN2-200	266006	16800	PN2-4-200	266012	21840
	250	PN2-250	266007	17920	PN2-4-250	266013	22960
	400	PN3-400	266017	29120	PN3-4-400	266021	37520
	630	PN3-630	266018	31920	PN3-4-630	266022	41440

BZM

- IEC 60947-2
- Class II Front Insulation
- Thermal Magnetic release (Fixed Overload and Fixed Short Circuit)

	Rated current(A)	Breaking Capacity (KA) Icu KA, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	16	25	BZMB1-A16	111528	5505	BZMB1-4-A16	112505	7580
	20		BZMB1-A20	111531	5505	BZMB1-4-A20	112509	7580
	25		BZMB1-A25	111534	5505	BZMB1-4-A25	112513	7580
	32		BZMB1-A32	111537	5505	BZMB1-4-A32	112517	7580
	40		BZMB1-A40	111540	5505	BZMB1-4-A40	112521	7580
	50		BZMB1-A50	111543	5505	BZMB1-4-A50	112525	7580
	63		BZMB1-A63	111546	5505	BZMB1-4-A63	112529	7580
	80		BZMB1-A80	111549	5505	BZMB1-4-A80	112533	7580
	100		BZMB1-A100	111552	5505	BZMB1-4-A100	112537	7580
			125	36	BZMC2-A125	121804	11445	-
160		BZMC2-A160	121805		12210	-	-	-
200		BZMC2-A200	121806		14280	-	-	-
250		BZMC2-A250	121807		14280	-	-	-

■ Ready Stock

Effective 1st February, 2021

Accessories for NZM

Rotary Handle

Description	For Use With	Part No.	Article No.	MRP.
Extended Rotary Handle	NZM1	NZM1-XTVD + NZM1/2-XV4	260166 + 261232	4360
Extended Rotary Handle	NZM2	NZM2-XTVD + NZM1/2-XV4	260168 + 261232	4360
Extended Rotary Handle	NZM3	NZM3-XTVD + NZM3/4-XV4	260170 + 261234	7415
Extended Rotary Handle	NZM4	NZM4-XTVD + NZM3/4-XV4	266614 + 261234	9595

Spreaders


Frame	For Use With	Part No.	MRP.	Part No.	MRP.
1	NZM	NZM1-XKVI	875	NZM1-4-XKVI	1035
2	NZM	NZM2-XKVI	1090	NZM2-4-XKVI	1310
3	NZM	NZM3-XKVI	1530	NZM3-4-XKVI	1910

Under Voltage Release

W/O Auxiliary Contacts




	Type	Voltage	Part No.	Article No.	MRP.	
For Use with NZM1						
	AC 50/60 HZ	24 V	NZM1-XU24AC	259434	4090	
		48 V	NZM1-XU48AC	259436	3940	
		60 V	NZM1-XU60AC	259438	4150	
		110 V-130 V	NZM1-XU110-130AC	259440	4090	
		208 V-240 V	NZM1-XU208-240AC	259442	4090	
		380 V- 440 V	NZM1-XU380-440AC	259444	4090	
		480 V- 525 V	NZM1-XU480-525AC	259446	5180	
	DC	12 V	NZM1-XU12DC	259450	4150	
		24 V	NZM1-XU24DC	259452	4150	
		110 V-130 V	NZM1-XU110-130DC	259458	4305	
		220 V-250 V	NZM1-XU220-250DC	259460	4305	
		For Use with NZM2 & NZM3				
		AC 50/60 HZ	24 V	NZM2/3-XU24AC	259491	3925
48 V			NZM2/3-XU48AC	259493	4725	
60 V			NZM2/3-XU60AC	259495	4725	
110 V-130 V			NZM2/3-XU110-130AC	259497	3925	
208 V-240 V			NZM2/3-XU208-240AC	259499	3925	
380 V-440 V			NZM2/3-XU380-440AC	259501	4250	
480 V-525 V			NZM2/3-XU480-525AC	259503	6540	
DC		12 V	NZM2/3-XU12DC	259507	4725	
		24 V	NZM2/3-XU24DC	259509	4095	
		110 V-130 V	NZM2/3-XU110-130DC	259515	3925	
		220 V-250 V	NZM2/3-XU220-250DC	259517	4250	
		For Use with NZM4				
		AC 50/60 HZ	24 V	NZM4-XU24AC	266189	8175
	48 V		NZM4-XU48AC	266190	9715	
	60 V		NZM4-XU60AC	266191	9715	
	110 V-130 V		NZM4-XU110-130AC	266192	8175	
	208 V-240 V		NZM4-XU208-240AC	266193	8175	
	380 V-440 V		NZM4-XU380-440AC	266194	8175	
	480 V-525 V		NZM4-XU480-525AC	266195	8175	
	DC	12 V	NZM4-XU12DC	266203	8175	
		24 V	NZM4-XU24DC	266204	8175	
		110 V-130 V	NZM4-XU110-130DC	266207	8175	
		220 V-250 V	NZM4-XU220-250DC	266208	8175	

Auxiliary Contact & Trip Indicating Contact for use with NZM

	Type	NO	NC	Part No.	Article No.	MRP.
	Single Contact	1	–	M22-K10	216376	220
		–	1	M22-K01	216378	220
	Double Contact	1	1	M22-CK11	107940	545
		2	–	M22-CK20	107898	525
		–	2	M22-CK02	107899	525


Shunt Release

W/O Auxiliary Contacts

	Type	Voltage	Part No.	Article No.	MRP.
For Use with NZM1					
	AC/DC	12 V AC/DC	NZM1-XA12AC/DC	259706	4360
		24 V AC/DC	NZM1-XA24AC/DC	259708	3270
		48 V AC/DC	NZM1-XA48AC/DC	259720	4360
		60 V AC/DC	NZM1-XA60AC/DC	259722	4360
		110 V-130 V AC/DC	NZM1-XA110-130AC/DC	259724	3270
		208 V-250 V AC/DC	NZM1-XA208-250AC/DC	259726	3270
		380 V-440 V AC/DC	NZM1-XA380-440AC/DC	259728	3490
For Use with NZM2 & NZM3					
	AC/DC	12 V AC/DC	NZM2/3-XA12AC/DC	259752	4360
		24 V AC/DC	NZM2/3-XA24AC/DC	259754	3545
		48 V AC/DC	NZM2/3-XA48AC/DC	259756	3545
		60 V AC/DC	NZM2/3-XA60AC/DC	259758	4360
		110 V-130 V AC/DC	NZM2/3-XA110-130AC/DC	259760	3545
		208 V-250 V AC/DC	NZM2/3-XA208-250AC/DC	259763	3545
		380 V-440 V AC/DC	NZM2/3-XA380-440AC/DC	259766	4360
For Use with NZM4					
	AC/DC	12 V AC/DC	NZM4-XA12AC/DC	266446	5725
		24 V AC/DC	NZM4-XA24AC/DC	266447	5725
		48 V AC/DC	NZM4-XA48AC/DC	266448	5725
		60 V AC/DC	NZM4-XA60AC/DC	266449	5725
		110 V-130 V AC/DC	NZM4-XA110-130AC/DC	266450	5725
		208 V-250 V AC/DC	NZM4-XA208-250AC/DC	266451	5725
		380 V-440 V AC/DC	NZM4-XA380-440AC/DC	266452	5725

Effective 1st February, 2021

Motor Mechanism

	Operating Voltage	Part No.	Article No.	MRP.
	For Use with NZM2			
	110 V-130 V 50/60 HZ	NZM2-XR110-130AC	259830	46325
	208 V-240 V 50/60 HZ	NZM2-XR208-240AC	259832	46325
	380 V-440 V 50/60 HZ	NZM2-XR380-440AC	259834	46325
	24 V-30 V DC	NZM2-XR24-30DC	259836	46325
	48 V-60 V DC	NZM2-XR48-60DC	259838	54500
	110 V-130 V DC	NZM2-XR110-130DC	259840	46325
	220 V-250 V DC	NZM2-XR220-250DC	259842	46325
	For Use with NZM3			
	110 V-130 V 50/60 HZ	NZM3-XR110-130AC	259848	46325
	208 V-240 V 50/60 HZ	NZM3-XR208-240AC	259850	46325
	380 V-440 V 50/60 HZ	NZM3-XR380-440AC	259852	46325
	24 V-30 V DC	NZM3-XR24-30DC	259854	46325
	48 V-60 V DC	NZM3-XR48-60DC	259856	54500
	110 V-130 V DC	NZM3-XR110-130DC	259858	46325
	220 V-250 V DC	NZM3-XR220-250DC	259860	46325
	For Use with NZM4			
	110 V-130 V 50/60 HZ	NZM4-XR110-130AC	266684	65400
	208 V-240 V 50/60 HZ	NZM4-XR208-240AC	266685	65400
	380 V-440 V 50/60 HZ	NZM4-XR380-440AC	266686	65400
	24 V-30 V DC	NZM4-XR24-30DC	266691	65400
	48 V-60 V DC	NZM4-XR48-60DC	266692	76300
	110 V-130 V DC	NZM4-XR110-130DC	266693	65400
	220 V-250 V DC	NZM4-XR220-250DC	266694	65400

For prices of Spreaders and Phase barriers, please contact Eaton sales office

Accessories for BZM

Accessories	BZM1	MRP.	BZM2	MRP.
Aux Contacts				
1NO	M22-K10	220	M22-K10	220
1NC	M22-K01	220	M22-K01	220
Shunt Release				
230-240VAC	BZM1-XA230-240VAC	On Request	BZM2-XA230-240VAC	On Request
400-440VAC	BZM1-XA400-440VAC		BZM2-XA400-440VAC	
24VDC	BZM1-XA24VDC		BZM2-XA24VDC	
Under Voltage Release				
230-240VAC	BZM1-XU230-240VAC	On Request	BZM2-XU230-240VAC	On Request
400-440VAC	BZM1-XU400-440VAC		BZM2-XU400-440VAC	
24VDC	BZM1-XU24VDC		BZM2-XU24VDC	
Rotary Handle	BZM1-XDV	On Request		
Extended Rotary Handle Rod, 400mm	BZM1-XTVD BZM1-XV4	On Request		


Spreaders

Rating (Amps)	For Use With	Part No.	MRP.	Part No.	MRP.
100	BZM1	BZM1-XKVI	305	BZM1-4-XKVI	385
250	BZM2	BZM2-XKVI	330		

Effective 1st February, 2021

Mini Contactor & Control Relay- DILE...


- Compact Size
- Interlocked Opposing Auxiliary Contacts – High Degree of Safety
- Up to 4 Add on Auxiliary Contacts
- Low Coil Consumption – Energy Savings
- Inbuilt suppressor in DC Coil Version
- Accessories: Mechanical Interlock, Reverser & Star Delta Wiring Kit etc.

Mini Contactor - DILEM, 3 Pole	AC-3 at 400V (A)	Auxiliary Contacts		Part No.	MRP.	Part No.	MRP.
				AC-Coil		DC-Coil	
	6.6	1 N/O	–	DILEEM-10(...)	1155	DILEEM-10-G(...)	1605
	6.6	–	1 N/C	DILEEM-01(...)	1155	DILEEM-01-G(...)	1605
	9	1 N/O	–	DILEM-10(...)	1210	DILEM-10-G(...)	1875
	9	–	1 N/C	DILEM-01(...)	1210	DILEM-01-G(...)	1875
	12	1 N/O	–	DILEM12-10(...)	1315	DILEM12-10-G(...)	1980
	12	–	1 N/C	DILEM12-01(...)	1315	DILEM12-01-G(...)	1980

To order please complete the part no. by adding Voltage Suffix and mention Article No., (Select from table below)

Coil Voltage	DILEEM-10(...)	DILEEM-01(...)	DILEM-10(...)	DILEM-01(...)	DILEM12-10(...)	DILEM12-01(...)
AC	Article No					
42/48V, 50/60HZ	51612	51637	51782	51791		
110/120V, 50/60HZ	51611	51636	51783	51792	127072	127088
220/240V, 50/60HZ	51609	51634	51785	51794		
230/240V, 50/60HZ	51608	51633	51786	51795	127075	127091
415/480V, 50/60HZ	51605	51630	51789	51798		
24V 50/60Hz	51596	51621	21417	20402	127079	127095
DC Coil Voltage						
12V DC	51644	51649	79594	79642		
24V DC	51643	51650	10213	10343	127132	127137
48V DC	51642	51648	10245	10496		
110V DC	51640	51646	10309	10136		
220V DC	51639	51645	10325	10168		

For all other coil voltages, please contact EATON sales office.

Mini Control Relay - DILER, 4 Pole	Auxiliary Contacts		Part No.	MRP.	Part No.	MRP.
			AC-Coil		DC-Coil	
	4 N/O	–	DILER-40(...)	1260	DILER-40-G(...)	1715
	3 N/O	1 N/C	DILER-31(...)	1260	DILER-31-G(...)	1715
	2 N/O	2 N/C	DILER-22(...)	1260	DILER-22-G(...)*	1715

Part No.	DILER-40(...)	DILER-31(...)	DILER-22(...)
AC Coil Voltage	Article No		
48V 50Hz	10190	10044	10201
110/120V, 50/60Hz	51756	51765	51774
220/240V, 50/60Hz	51758	51767	51776
230/240V, 50/60Hz	51759	51768	51777
415/480V, 50/60Hz	51762	51771	51780
24V 50/60Hz	21924	21594	21704
42V 50/60Hz	33459	29869	29433
DC Coil Voltage			
12V DC	79711	79761	80728
24V DC	10223	10157	10042
48V DC	10255	10205	10346
110V DC	10287	10253	10043
220V DC	10303	10269	10091

For all other coil voltages, please contact EATON sales office.


*DILER-22-G Add-on-Block can't be mounted

Control Relay: DILA and Power Contactor: 3 Pole DILM






- Global Approvals: IEC, UL, CSA, CE
- Low Coil Consumption: Energy Savings
- High Electrical Lifespan
- Double Box Terminals: High Wiring Integrity & Reliability
- Coil Terminals on front as standard for quick & easy wiring
- Type 2 Coordinated Starters with PKZ MPCB's & NZM MCCB's
- Electronic Actuated Coil version available - Contact Eaton

DC Operated added benefits

- Electronic actuated Coil as standard from 17A - 170A, Optional 185A onwards
- Suppressor Integrated into Coil Circuit: Cost savings, Easy engineering
- Direct actuation by PLC upto 32A: No need for coupler relays
- Same dimension as AC operated contactor: Easy engineering
- Wide band coil (0.7 - 1.3) as standard from 17A-170A: Reliable performance

Control Relay - DILA	AC-15 at 400V (A)	Auxiliary Contacts	Part No.	MRP.	Part No.	MRP.	
	Screw Terminals		AC-Coil		DC-Coil		
	4	4 N/O –	DILA-40(...)	1265	DILA-40(...)	1875	
	4	3 N/O 1 N/C	DILA-31(...)	1265	DILA-31(...)	1875	
	4	2 N/O 2 N/C	DILA-22(...)	1265	DILA-22(...)	1875	
	Spring Loaded Terminals						
	4	4 N/O –	DILAC-40(...)	On Request	DILAC-40(...)	On Request	
	4	3 N/O 1 N/C	DILAC-31(...)		DILAC-31(...)		
	4	2 N/O 2 N/C	DILAC-22(...)		DILAC-22(...)		

To order please complete the part no. by adding Voltage Suffix and mention Article No.

Power Contactor, 3 Pole	AC-3 at 400V (A)	Motor KW at 400V, 50Hz	Auxiliary Contacts	Part No.	MRP. AC-Coil	MRP. DC-Coil
	7	3	1 N/O –	DILM7-10(...)	1080	1605
	7	3	– 1 N/C	DILM7-01(...)	1080	1605
	9	4	1 N/O –	DILM9-10(...)	1165	1925
	9	4	– 1 N/C	DILM9-01(...)	1165	1925
	12	5.5	1 N/O –	DILM12-10(...)	1390	2020
	12	5.5	– 1 N/C	DILM12-01(...)	1390	2020
	15	7.5	1 N/O –	DILM15-10(...)	1500	2345
	15	7.5	– 1 N/C	DILM15-01(...)	1500	2345
	17	7.5	1 N/O –	DILM17-10(...)	2035	3990
	17	7.5	– 1 N/C	DILM17-01(...)	2035	3990
	25	11	1 N/O –	DILM25-10(...)	2140	4190
	25	11	– 1 N/C	DILM25-01(...)	2140	4190
	32	15	1 N/O –	DILM32-10(...)	4140	7685
	32	15	– 1 N/C	DILM32-01(...)	4140	7685
	38	18.5	1 N/O –	DILM38-10(...)	6050	8940
	38	18.5	– 1 N/C	DILM38-01(...)	6050	8940
	40	18.5	– –	DILM40(...)	6430	9830
	50	22	– –	DILM50(...)	7905	12470
	65	30	– –	DILM65(...)	11230	14030
	72	37	– –	DILM72(...)	12970	16190
	80	37	– –	DILM80(...)	13515	17025
	95	45	– –	DILM95(...)	16895	20820
	115	55	– –	DILM115(...)	20600	21560
	150	75	– –	DILM150(...)	27470	27720
	170	90	– –	DILM170(...)	32155	35110
	185	90	2 NO 2 NC	DILM185A/22(...)	35730	37575
	225	110	2 NO 2 NC	DILM225A/22(...)	39200	40040
	250	132	2 NO 2 NC	DILM250/22(...)	46325	48875
	300	160	2 NO 2 NC	DILM300A/22(...)	56710	60950
	400	200	2 NO 2 NC	DILM400/22(...)	73500	74900
	500	250	2 NO 2 NC	DILM500/22(...)	94590	101660

- To order please complete the part no. by adding Voltage Suffix and mention Article No.
- For Power Contactors with spring loaded terminal, please contact Eaton sales office

Voltage Suffix and Article Numbers for ordering

Coil Voltage	DILA-40(...)	DILA-31(...)	DILA-22(...)	DILAC-40(...)	DILAC-31(...)	DILAC-22(...)
AC	Article No					
110/120V, 50/60HZ	276326	276361	276396	276438	276470	276502
220/240V, 50/60HZ	276328	276363	276398			
230/240V, 50/60HZ	276329	276364	276399	276441	276473	276505
400/440V, 50/60HZ	276331	276366	276401			
24V 50/60Hz	276333	276368	276403	276445	276477	276509
42V 50/60Hz	276334	276369	276404			
DC Coil Voltage						
24V DC	276344	276379	276414	276456	276488	276520
48V DC	276345	276380	276415			
110V DC	276347	276382	276417	276459	276491	276523
220V DC	276348	276383	276418	276460	276492	276524

For all other coil voltages, please contact EATON sales office.

Coil Voltage	DILM7-10(...)	DILM7-01(...)	DILM9-10(...)	DILM9-01(...)	DILM12-10(...)	DILM12-01(...)
AC	Article No					
42/48V, 50/60HZ	276546		276686		276826	
110/120V, 50/60HZ	276547	276582	276687	276722	276827	276862
220/240V, 50/60HZ	276549	276584	276689	276724	276829	276864
230/240V, 50/60HZ	276550	276585	276690	276725	276830	276865
24V 50/60Hz	276554	276589	276694	276729	276834	276869
400/440V, 50/60Hz	276552	276587	276992	276727	276832	276867
DC Coil Voltage						
24V	276565	276600	276705	276740	276845	276880
48V	276566	276601	276706	276741	276846	276881
110V	276568	276603	276708	276743	276848	276883
220V	276569	276604	276709	276744	276849	276884

Coil Voltage	DILM15-10(...)	DILM15-01(...)	DILM17-10(...)	DILM17-01(...)	DILM25-10(...)	DILM25-01(...)
AC	Article No					
42/48V, 50/60HZ			277000		277128	
110/120V, 50/60HZ	290055	290090	277001	277033	277129	277161
190/220V, 50/60HZ			277002		277130	
220/240V, 50/60HZ			277003		277131	
230/240V, 50/60HZ	290058	290093	277004	277036	277132	277164
380/440V, 50/60HZ			277005		277133	
400/440V, 50/60HZ			277006	277038	277134	277166
415/480V, 50/60HZ			277007		277135	
24V 50/60Hz	290062	290097	277008	277040	277136	277168
42V 50/60Hz			277009		277137	
110V 50/60Hz			277010	277042	277138	277170
220V 50/60Hz			277011	277043	277139	277171
230V 50/60Hz	290066	290101	277012	277044	277140	277172
DC Coil Voltage						
24V	290073	290108				
RDC24			277018	277050	277146	277178
RDC60			277019	277051	277147	277179
RDC130			277020	277052	277148	277180
RDC240			277021	277053	277149	277181

Note :-

RDC 48(24-48VDC)
 RA 110(48-110V,40-60Hz / 48-110VDC)
 RA 250(110-250V,40-60Hz / 110-250VDC)
 RAC 500 (250-500V,40-60Hz), DC on Request

RDC 24 (24-27V DC)
 RDC 60 (48-60V DC)
 RDC 130 (110-130V DC)
 RDC 240 (200-240V DC)

RAC 24 (24V)
 RAC 48 (42-48V)
 RAC 120 (100-120V)
 RAC 240 (190-240V)
 RAC 440 (380-440V)
 RAC 500 (480-500V)

Effective 1st February, 2021

Voltage Suffix and Article Numbers for ordering

Coil Voltage	DILM32-10(...)	DILM32-01(...)	DILM38-10(...)	DILM38-01(...)	DILM40(...)	DILM50(...)
AC	Article No.					
110,120V,50/60HZ	277257	277289	112425	112453	277763	277827
220/240V,50/60HZ	277259	277291	112427	–	277765	277829
230/240V,50/60HZ	277260	277292	112428	112456	277766	277830
415/480V,50/60HZ	277263	277295	112431	–	277769	277833
24V 50/60HZ	277264	277296	112432	112460	277770	277834
42V 50/60HZ	277265	–	112433	–	277771	277835
110V 50/60HZ	277266	277298	112434	112462	277772	277836
220V 50/60HZ	277267	277299	112435	112463	277773	277837
230V 50/60HZ	277268	277300	112436	112464	277774	277838

DC Coil Voltage

RDC24	277274	277306	112442	112470	277780	277844
RDC60	277275	277307	112443	112471	277781	277845
RDC130	277276	277308	112444	112472	277782	277846
RDC240	277277	277309	112445	112473	277783	277847

Coil Voltage	DILM65(...)	DILM72(...)	DILM80(...)	DILM95(...)
AC	Article No.			
110,120V,50/60HZ	277891	109191	239399	239477
220/240V,50/60HZ	277893	109193	239401	239479
230/240V,50/60HZ	277894	107670	239402	239480
24V 50/60HZ	277898	109197	239406	239484
42V 50/60HZ	277899	–	239407	239485

DC Coil Voltage

RDC24	277908	107671	239416	239510
RDC60	277909	–	239417	239511
RDC130	277910	109208	239418	239512
RDC240	277911	109209	239419	239513

Coil Voltage	DILM115(...)	DILM150(...)	DILM170(...)	DILM185A/22(...)	DILM225A/22(...)
AC	Article No.				
RAC24	239545	239585	107010	139534	139544
RAC48	239546	239586	107011	139535	139545
RAC120	239547	239587	107012	139536	139546
RAC240	239548	239588	107013	139537	139547
RAC440	239549	239589	107014	139538	139548
RAC500	239550	239590	107015	139539	139549

DC Coil Voltage

RDC24	239555	239591	107016	139540	139550
RDC60	239560	239592	107017	139541	139551
RDC130	239567	239593	107018	139542	139552
RDC240	239572	239594	107019	139543	139553


Coil Voltage	DILM250/22(...)	DILM300A/22(...)	DILM400/22	DILM500/22(...)
AC/DC	Article No.			
RDC48	208199	139554	208207	208211
RA110	208200	139555	208208	208212
RA250	208201	139556	208209	208213
RAC500	208202	139557	208210	208214
110-120V 50/60Hz	274189	139558	274195	274198
220-240V 50/60Hz	274190	139559	274196	274199

For all other coil voltages, please contact EATON sales office.

Effective 1st February, 2021

Vacuum Contactors - Type DILM

- Global Approvals : IEC , UL , CSA, CE
- Ideal for high dust and high switching duty applications
- Direct actuation from PLC
- Switching in Vacuum - Very High Electrical Life
- Low Coil Consumption : Energy Savings

AC-3 at 400V (A)	AC-3 at 400V (A)	Motor KW at 400V, 50Hz	Auxiliary Contacts		Part No.	MRP.
						AC & DC-Coil
	580	315	2 NO	2 NC	DILM580/22(...)	279040
	650	355	2 NO	2 NC	DILM650/22(...)	299600
	750	400	2 NO	2 NC	DILM750/22(...)	425100
	820	450	2 NO	2 NC	DILM820/22(...)	447260
	1000	560	2 NO	2 NC	DILM1000/22(...)	On request
	1600	900	2 NO	2 NC	DILM1600/22(...)	


For lower rating vacuum contactors, please contact Eaton office

To order please complete the part no. by adding Voltage Suffix and mention Article No., (Select from next table)

Coil Voltage	DILM580/22(...)	DILM650/22(...)	DILM750/22(...)	DILM820/22(...)	DILM1000/22(...)	DILM1600/22(...)
AC/DC	Article No.					
RA110	208215	208218	208221	208224	-	-
RA250	208216	208219	208222	208225	267214	-
RAC500	208217	208220	208223	208226	271990	-

Capacitor Duty Contactor - DILK

- Welding- resistant for capacitors with inrush current peaks up to $180 \times I_N$
- The capacitors are pre-charged via the early-make auxiliary contacts
- DILK..., cannot be combined with other auxiliary contacts
- With group compensation multi-stage capacitor banks are connected to the mains are required.
- The contactors for capacitors are weld-resistant with inrush current peaks up to $180 \times I_N$ due to their special contacts

Capacitor Duty Contactor - DILK	KVAR 400V,3ph, 50/60 Hz	Auxiliary Contacts	Part No.	MRP.
	12.5	1 NO + 1 NC	DILK12-11(...)	3730
	20	1 NO + 1 NC	DILK20-11(...)	4515
	25	1 NO + 1 NC	DILK25-11(...)	4725
	33.3	1 NO	DILK33-10(...)	10475
	50	1 NO	DILK50-10(...)	15435


To order please complete the part no. by adding Voltage Suffix and mention Article No., (Select from table below)

Coil Voltage	DILK12-11(...)	DILK20-11(...)	DILK25-11(...)	DILK33-10(...)	DILK50-10(...)
AC	Article No.				
230/240V, 50/60HZ	293988	294010	294032	294054	294076
400/440V, 50/60HZ	293990	294012	294034	294056	294078

For all other coil voltages, please contact EATON sales office.

Power Contactors - DILMP, 4 Pole

- Global Approvals: IEC, UL, CSA, CE
- High Electrical Lifespan
- Coil Terminals on front as standard for quick & easy wiring
- Suppressor Integrated in all DC Coil Contactors and in Electronic Coil actuated AC Contactors
- Low Coil Consumption: Energy Savings
- Double Box Terminals : High Wiring Integrity & reliability
- Electronic Actuated Coils : Extremely Low Consumption, High Energy Savings

Power Contactors - DILMP, 4 Pole	AC-1 Amps	Main Contacts	Auxiliary Contacts		Part No.	MRP.	Part No.	MRP.
					AC Operated		DC Operated	
	22	4NO	–	–	DILMP20(...)	1720	DILMP20(...)	2890
	32	4NO	1NO	–	DILMP32-10(...)	2835	DILMP32-10(...)	4095
	32	4NO	–	1NC	DILMP32-01(...)	2835	DILMP32-01(...)	4095
	45	4NO	1NO	–	DILMP45-10(...)	3215	DILMP45-10(...)	5380
	45	4NO	–	1NC	DILMP45-01(...)	3215	DILMP45-01(...)	5380
	63	4NO	–	–	DILMP63(...)	8285	DILMP63(...)	9845
	80	4NO	–	–	DILMP80(...)	13080	DILMP80(...)	14305
	125	4NO	–	–	DILMP125(...)	17440	DILMP125(...)	17985
	160	4NO	–	–	DILMP160(...)	17985	DILMP160(...)	20165
	200	4NO	–	–	DILMP200(...)	22000	DILMP200(...)	25625

To order please complete the part no. by adding Voltage Suffix and mention Article No., (Select from table below)


Coil Voltage	DILMP20(...)	DILMP32-10(...)	DILMP32-01(...)	DILMP45-10(...)	DILMP45-01(...)	DILMP63(...)
AC	Article No.					
110,120V,50/60HZ	276967	109790	118912	109819	119815	109848
230/240V,50/60HZ	276970	109797	118911	109826	119814	109855
24V 50/60HZ	276974	109799	191943	109828	–	109857
230V 50/60HZ	276978	109796	–	109825	–	109883
DC Coil Voltage						
24V DC	276985	–	–	–	–	–
RDC24	–	109811	118913	109840	118916	109869

Coil Voltage	DILMP80(...)	DILMP125(...)	DILMP160(...)	DILMP200(...)
AC	Article No.			
110/120V, 50/60HZ	109887	–	–	–
230/240V, 50/60HZ	109884	–	–	–
RAC120(100-120V 50/60HZ)	–	109903	109913	109923
RAC240	–	109905	109915	109925
RAC24	–	109904	109914	109924
DC Coil Voltage				
RDC24	109898	109910	109920	109930

For all other coil voltages, please contact EATON sales office.


Auxiliary Contact Modules for Mini Contactors

- Interlocked Opposing contacts - High Reliability and safety

Auxiliary Contact Modules for Mini Contactors	Pole	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP.
	2 Pole	– 2 N/C	DILEEM DILEM DILEM12 DILER DILEM4	02DILE	010240	385
		1 N/O 1 N/C		11DILE	010224	385
		2 N/O –		20DILE	010208	385
	4 Pole	– 4 N/C		04DILE	010256	625
		1 N/O 3 N/C		13DILE	002397	625
		2 N/O 2 N/C		22DILE	010288	625
		3 N/O 1 N/C		31DILE	048912	625
		4 N/O		40DILE	010304	625

Auxiliary Contact Modules for Contactors

- Interlocked Opposing contacts - High Reliability and safety

Auxiliary Contact Modules for Contactors	Pole	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP.
	2 Pole	– 2 N/C	DILM7...DILM38 DILMP20...DILMP45 DILA... DILL...	DILA-XHI02	276420	370
		1 N/O 1 N/C		DILA-XHI11	276421	345
		2 N/O –		DILA-XHI20	276422	345
	4 Pole	– 4 N/C		DILA-XHI04	276424	665
		1 N/O 3 N/C		DILA-XHI13	276425	625
		2 N/O 2 N/C		DILA-XHI22	276426	625
		3 N/O 1 N/C		DILA-XHI31	276427	625
		4 N/O		DILA-XHI40	276428	625

Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
2 N/O –	DILM40...DILM170 DILMP63...DILMP200 DILMF40...DILMF150	DILM150-XHI20	277945	405
1 N/O 1 N/C		DILM150-XHI11	277946	405
1 N/O 1 N/C		DILM150-XHIA11	283463	405
– 2 N/C		DILM150-XHI02	277947	405
4 N/O –		DILM150-XHI40	277948	625
3 N/O 1 N/C		DILM150-XHI31	277949	625
2 N/O 2 N/C		DILM150-XHI22	277950	625
2 N/O 2 N/C		DILM150-XHIA22	283464	625
1 N/O 3 N/C		DILM150-XHI13	277951	625
– 4 N/C		DILM150-XHI04	277952	625

Side Mounting, Screw Terminal

Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
1 N/O –	DILM7...DILM15 DILMP20 DILA...	DILA-XHI10-S	115948	660
– 1 N/C		DILA-XHI01-S	115949	660
1 N/O 1 N/C	DILM17...DILM38	DILM32-XHI11-S	101371	690
1 N/O 1 N/C	DILM250...DILH2600	DILM820-XHI11-SI	208281	710
1 N/O 1 N/C		DILM820-XHI11-SA	208282	710
1 N/O 1 N/C	DILM40...DILM225A DILMP63...DILMP200 DILMF40...DILMF95	DILM1000-XHI11-SI	278425	710
1 N/O 1 N/C		DILM1000-XHI11-SA	278427	710


Suppressor

Suppressor	For Use With	Voltage	Part No.	Article No.	MRP
RC- Suppressors	DILE...	24 - 48	RCDILE48	044264	640
		110 - 250	RCDILE250	046320	640
	DILM7 - DILM15 DILMP20 DILA	24 - 48	DILM12-XSPR48	281199	585
		110 - 240	DILM12-XSPR240	281200	585
		240 - 500	DILM12-XSPR500	281201	585
	DILM17 - DILM32, DILK12 - DILK25 DILL DILMP32 - DILMP45	24 - 48	DILM32-XSPR48	281202	745
		110 - 240	DILM32-XSPR240	281203	745
		240 - 500	DILM32-XSPR500	281204	745
	DILM40 - DILM95, DILK33 - DILK50 DILMP63-DILMP200	24 - 48	DILM95-XSPR48	281205	875
		110 - 240	DILM95-XSPR240	281206	875
		240 - 500	DILM95-XSPR500	281207	875
	Varistor- Suppressors	DILE...	24 - 48	VGDILE48	010320
48 - 130			VGDILE130	150681	525
110 - 250			VGDILE250	010336	525
380 - 415			VGDILE415	010463	525
DILM7 - DILM15 DILMP20 DILA		24 - 48	DILM12-XSPV48	281208	575
		48 - 130	DILM12-XSPV130	281209	575
		130- 240	DILM12-XSPV240	281210	575
		240 - 500	DILM12-XSPV500	281211	575
DILM17 - DILM32 DILK12 - DILK25 DILL DILMP32 - DILMP45		24 - 48	DILM32-XSPV48	281212	745
		48 - 130	DILM32-XSPV130	281213	745
		110 - 240	DILM32-XSPV240	281214	745
		240 - 500	DILM32-XSPV500	281215	745
DILM40 - DILM95, DILK33 - DILK50 DILMP63 - DILMP200		24 - 48	DILM95-XSPV48	281216	875
		48 - 130	DILM95-XSPV130	281217	875
		130 - 240	DILM95-XSPV240	281218	875
		240 - 500	DILM95-XSPV500	281219	875


Mechanical Interlock

For Use With	Part No.	Article No.	MRP
DILE...	MVDILE	010113	585
DILM7...DILM15, DILMP20, DILA	DILM12-XMV	281196	350
DILM17..DILM38, DILMP32..DILMP45, DILMF8...DILMF32	DILM32-XMV	281197	350
DILM40...DILM72,DILMP63...DILMP80, DILMF40...DILMF65	DILM65-XMV	281198	350
DILM80...DILM170, DILMP125..DILMP200, DILMF80, DILMF150	DILM150-XMV	240081	5300
DILM185A, 225A, 250, 300A, 400, 500	DILM500-XMV	208289	5300
DILM580, 650, 750, 820, 1000	DILM820-XMV	208288	On Request

PKZM01 - Motor Protective Circuit Breaker, Push Button Type

KA (Iq) Rating at 400/415v	Rated Current (A)	Over Load Range (A)	Part No.	Article No.	MRP
 50KA	0.16	0.1 - 0.16	PKZM01-0.16	278475	3545
	0.25	0.16 - 0.25	PKZM01-0.25	278476	3545
	0.4	0.25 - 0.4	PKZM01-0.4	278477	3545
	0.63	0.4 - 0.63	PKZM01-0.63	278478	3980
	1	0.63 - 1	PKZM01-1	278479	4035
	1.6	1 - 1.6	PKZM01-1.6	278480	4035
	2.5	1.6 - 2.5	PKZM01-2.5	278481	4140
	4	2.5 - 4	PKZM01-4	278482	4140
	6.3	4 - 6.3	PKZM01-6.3	278483	4140
	10	6.3 - 10	PKZM01-10	278484	4140
	12	8 - 12	PKZM01-12	278485	4635
	16	10 - 16	PKZM01-16	283390	4905
	20	16 - 20	PKZM01-20	283383	5180
	25	20 - 25	PKZM01-25	288893	5395

PKZM0 - Motor Protective Circuit Breaker, Rotary Knob Type

KA (Iq) Rating at 400/415v	Rated Current (A)	Over Load Range (A)	Part No.	Article No.	MRP
 150KA	0.16	0.1 - 0.16	PKZM0-0.16	072730	3760
	0.25	0.16 - 0.25	PKZM0-0.25	072731	3760
	0.4	0.25 - 0.4	PKZM0-0.4	072732	3760
	0.63	0.4 - 0.63	PKZM0-0.63	072733	4305
	1	0.63 - 1	PKZM0-1	072734	4305
	1.6	1 - 1.6	PKZM0-1.6	072735	4305
	2.5	1.6 - 2.5	PKZM0-2.5	072736	4305
	4	2.5 - 4	PKZM0-4	072737	4415
	6.3	4 - 6.3	PKZM0-6.3	072738	4470
	10	6.3 - 10	PKZM0-10	072739	4795
50KA	12	8 - 12	PKZM0-12	278486	5180
	16	10 - 16	PKZM0-16	046938	5885
	20	16 - 20	PKZM0-20	046988	6815
	25	20 - 25	PKZM0-25	046989	6920
	32	25 - 32	PKZM0-32	278489	10790

PKZM4 - Motor Protective Circuit Breaker, Rotary Knob Type


KA (Iq) Rating at 400/415v	Rated Current (A)	Over Load Range (A)	Part No.	Article No.	MRP
150KA	16	10 - 16	PKZM4-16	222350	11990
	25	16 - 25	PKZM4-25	222352	11990
50KA	32	25 - 32	PKZM4-32	222353	11990
	40	32 - 40	PKZM4-40	222354	13625
	50	40 - 50	PKZM4-50	222355	16190
	58	50 - 58	PKZM4-58	222394	16895
	63	55 - 63	PKZM4-63	222413	16895


Accessories


Type			Part No.	Article No.	MRP
Auxiliary Contacts					
Front Mounted	1N/O	–	NHI-E-10-PKZO ■	082884	605
	1N/O	1N/C	NHI-E-11-PKZO ■	082882	745
	–	1N/C	NHI-E-01-PKZO-C ■	229682	1155
Side Mounted	1N/O	1N/C	NHI11-PKZO ■	072896	825
	1N/O	2N/C	NHI12-PKZO ■	072895	955
	2N/O	1N/C	NHI21-PKZO ■	072894	955
Trip Contact	2N/O	–	AGM2-10-PKZO ■	072898	1515
	–	2N/C	AGM2-01-PKZO ■	072899	1515
Shunt Release	AC	230V	A-PKZO ■	073187	2230
	DC	24V	A-PKZO ■	073200	2230
UV Release	AC	230V	U-PKZO ■	073135	2230
Rotary Handle, IP65	Rotary Handle, Black		PKZO-XH	106132	2545
	Rotary Handle, Red-Yellow		PKZO-XRH	106133	3180
IP 65 Enclosure	PKZM01		CI-PKZ01-G ■	281404	2545
			CI-PKZ01-SVB ■	281405	3290
			CI-PKZ01-PVT ■	281406	4880
	PKZM0		CI-K2-PKZ0-G ■	219654	3605
			CI-K2-PKZ0-GR ■	219655	3710
	PKZM4		CI-K4-PKZ4-G ■	225524	7210
		CI-K4-PKZ4-GR ■	225525	7210	


Overload Relay

- Phase failure sensitivity to IEC/EN 60947, VDE 0660 Part 102
- Test/off push button
- Reset push button
- Trip-free release
- Direct Mounting

ZE...	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	0.1-0.16	1 N/O + 1 N/C	DILE... DIULEM/21/MV SDAINLEM	ZE-0.16	014263	1745
	0.16-0.24			ZE-0.24	014285	1745
	0.24-0.4			ZE-0.4	014300	1745
	0.4-0.6			ZE-0.6	014333	1745
	0.6-1			ZE-1.0	014376	1745
	1-1.6			ZE-1.6	014432	1745
	1.6-2.4			ZE-2.4	014479	1745
	2.4-4			ZE-4	014518	1745
	4-6			ZE-6	014565	1745
	6-9			ZE-9	014708	1745
	9-12		ZE-12	014752	1745	


ZB12	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	0.1-0.16	1 N/O + 1 N/C	DILM7...DILM15	ZB12-0.16	278431	1745
	0.16-0.24			ZB12-0.24	278432	1745
	0.24-0.4			ZB12-0.40	278433	1745
	0.4-0.6			ZB12-0.60	278434	1745
	0.6-1			ZB12-1	278435	1745
	1-1.6			ZB12-1.60	278436	1745
	1.6-2.4			ZB12-2.4	278437	1745
	2.4-4			ZB12-4	278438	1745
	4-6			ZB12-6	278439	1745
	6-10			ZB12-10	278440	1745
	9-12			ZB12-12	278441	1745
	12-16			ZB12-16	290168	1745


ZB32	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	0.1-0.16	1 N/O + 1 N/C	DILM17...DILM38	ZB32-0.16	278442	1910
	0.16-0.24			ZB32-0.24	278443	1910
	0.24-0.4			ZB32-0.40	278444	1910
	0.4-0.6			ZB32-0.60	278445	1910
	0.6-1			ZB32-1	278446	1910
	1-1.6			ZB32-1.6	278447	1910
	1.6-2.4			ZB32-2.4	278448	1910
	2.4-4			ZB32-4	278449	1910
	4-6			ZB32-6	278450	1910
	6-10			ZB32-10	278451	1910
	10-16			ZB32-16	278452	1910
	16-24			ZB32-24	278453	3215
	24-32			ZB32-32	278454	3380
	32-38			ZB32-38	112474	3380

ZB65	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	6-10	1 N/O + 1 N/C	DILM40...DILM72	ZB65-10	278455	4035
	10-16			ZB65-16	278456	4035
	16-24			ZB65-24	278457	4035
	24-40			ZB65-40	278458	3815
	40-57			ZB65-57	278459	5995
	50-65			ZB65-65	278460	5995
	65-75			ZB65-75	108792	6320


■ Ready Stock

Effective 1st February, 2021

ZB150	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	35-50	1 N/O + 1 N/C	DILM80...DILM170	ZB150-50	278462	13250
	50-70			ZB150-70	278463	13250
	70-100			ZB150-100	278464	13250
	95-125			ZB150-125	278465	13250
	120-150			ZB150-150	278466	13250
	145-175			ZB150-175	107316	14310

Z5	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP	
	50-70	1 N/O + 1 N/C	DILM185 DILM225	Z5-70/FF225A	139572	15900	
	70-100			Z5-100/FF225A	139573	15900	
	95-125			Z5-125/FF225A	139574	15900	
	120-160			Z5-160/FF225A	139575	15900	
	160-220			Z5-220/FF225A	139576	15900	
	200-250			Z5-250/FF225A	139577	15900	
	50-70			DILM250	Z5-70/FF250	210070	15900
	70-100				Z5-100/FF250	210071	15900
	95-125				Z5-125/FF250	210072	15900
	120-160		Z5-160/FF250		210073	15900	
	160-220		Z5-220/FF250		210074	15900	
	200-250		Z5-250/FF250		210075	15900	
	200-300		DILM300		Z5-300/FF250	139578	16960


ZW7 Current Transformer - Operated Overload Relay

ZW7	Setting Range of O/L release (A)	Auxiliary Contacts	Part No.	Article No.	MRP
	42-63	1 N/O + 1 N/C	ZW7-63	000245	15900
	60-90		ZW7-90	002618	15900
	85-125		ZW7-125	004991	15900
	110-160		ZW7-160	007364	16960
	160-240		ZW7-240	009737	16960
	190-290		ZW7-290	052448	16960
	270-400		ZW7-400	045329	16960
	360-540		ZW7-540	047702	22790
	420-630		ZW7-630	050075	22790

Accessories

Base

For Separate Mounting

	For Use with	Part No.	Article No.	MRP
	ZB32	ZB32-XEZ	278473	700
	ZB65	ZB65-XEZ	278474	1060

Effective 1st February, 2021

Direct-on-Line Starter, 400/415 V

AC-3 380 V 400 V 415 V	Rated operation current 400 V	Rated short circuit current		Overload release	Short-circuit release	MPCB	Contactor
P KW	I _e A	I _q KA	(50)	I _r KA	I _{rm} A	Part No.	Part No.
0.06	0.21	150	(50)	0.16-0.25	3.5	PKZM0-0.25	DILM7-..
0.09	0.31	150	(50)	0.25-0.4	5.6	PKZM0-0.4	DILM7-..
0.12	0.41	150	(50)	0.40-0.63	8.82	PKZM0-0.63	DILM7-..
0.18	0.6	150	50)	0.40-0.63	8.82	PKZM0-0.63	DILM7-..
0.25	0.8	150	(50)	0.63-1	14	PKZM0-1	DILM7-..
0.37	1.1	150	(50)	1.00-1.6	22.4	PKZM0-1.6	DILM7-..
0.55	1.5	150	(50)	1.00-1.6	22.4	PKZM0-1.6	DILM7-..
0.75	1.9	150	(50)	1.60-2.5	35	PKZM0-2.5	DILM7-..
1.1	2.6	150	(50)	2.50-4	56	PKZM0-4	DILM7-..
1.5	3.6	150	(50)	2.50-4	56	PKZM0-4	DILM7-..
2.2	5	150	(50)	4.00-6.3	88.2	PKZM0-6.3	DILM7-..
3	6.6	150	(50)	6.3-10	140	PKZM0-10	DILM17-..
4	8.5	150	(50)	6.3-10	140	PKZM0-10	DILM17-..
5.5	11.3	50		8-12	168	PKZM0-12	DILM17-..
7.5	16(15.5)2	50		10-16	224	PKZM0-16	DILM17-..
11	21.7	50		20-25	350	PKZM0-25	DILM25-..
15	29.3	50		25-32	448	PKZM0-32	DILM32-..
18.5	36	50		32-40	560	PKZM4-40	DILM40
22	41	50		40-50	700	PKZM4-50	DILM50
30	55	50		50-58	812	PKZM4-58	DILM65
37	68	50		63-80	8-14*	NZMN1-M80	DILM80
45	81	50		80-100	8-12.5*	NZMN1-M100	DILM95
55	99	50		80-100	8-14*	NZMN2-M160	DILM115
75	134	50		125-160	8-14*	NZMN2-M160	DILM150
90	161	50		160-200	8-14*	NZMN2-M200	DILM185
110	196	50		160-200	8-14*	NZMN2-M200	DILM225

Star Delta Starter, 400/415V

Kw	Rating (A)	S/C Current	MPCB/MCCB			Contactor			Timer
			Type	O/L Release	S/C Release	Line	Delta	Star	
5.5	11.3	50	PKZM0-12	8...12	168	DILM17	DILM17	DILM17	ETR4-51
7.5	15.2	50	PKZM0-16	10...16	224	DILM17	DILM17	DILM17	ETR4-51
11	21.7	50	PKZM0-25	20...25	350	DILM17	DILM17	DILM17	ETR4-51
12.5	25	50	PKZM0-25	20...25	350	DILM17	DILM17	DILM17	ETR4-51
15	29.3	50	PKZM0-32	25...32	448	DILM17	DILM17	DILM17	ETR4-51
18.5	36	50	PKZM4-40	32...40	560	DILM40	DILM40	DILM40	ETR4-51
22	41	50	PKZM4-50	40...50	700	DILM40	DILM40	DILM40	ETR4-51
30	55	50	PKZM4-58	50...58	812	DILM40	DILM40	DILM40	ETR4-51
37	68	50	NZMN1-M80	63...80	8-14	DILM80	DILM80	DILM50	ETR4-51
45	81	50	NZMN1-M100	80...100	8-12.5	DILM80	DILM80	DILM50	ETR4-51
55	99	50	NZMN1-M100	80...100	8-14	DILM80	DILM80	DILM50	ETR4-51
65	116	50	NZMN2-M125	100...125	8-14	DILM95	DILM95	DILM65	ETR4-51
75	134	50	NZMN2-M160	125...160	8-14	DILM115	DILM115	DILM80	ETR4-51
90	161	50	NZMN2-M200	160...200	8-14	DILM185	DILM185	DILM115	ETR4-51
110	196	50	NZMN2-M200	160...200	8-14	DILM185	DILM185	DILM115	ETR4-51

Global technology Regional solutions

Electrical
standards and
certifications

America | Europe | Middle East | Africa | Asia Pacific



Effective 1st February, 2021

Terms & Conditions

1. Prices are Maximum Retail Prices, Ex Warehouse.
2. Prices are subject to change without prior notice.
3. Prices applicable at the time of delivery will be charged.
4. Normal stock items classification is subject to change without prior notice
5. Warranty: Products are covered under warranty for a period of 12 months from the date of supply against any manufacturing defect subject to usage under normal conditions and as per technical parameters set out in technical catalogues and installation manuals.

Eaton's liability shall be limited to replace/repair the defective product, at its option, ex warehouse basis, after the defective products is returned to our warehouse/sales office.



India Head Office

Eaton Power Quality Pvt. Ltd.

2, EVR Street, Sedarpet

Industrial Estate

Pondicherry-605111

Tel: +91 413 2672000

Enquiries - EatonElectricalIndia@eaton.com

www.eaton.com

© 2021 Eaton Corporation All Rights Reserved India

Offices Across India

Mumbai

EL Floor, VITS Luxury Business Hotel
Andheri Kuria Road., Andheri (East)
Mumbai - 400 059
Tel: +91 22 45110100
Mobile: +91 8291967878, 9321199760

Chennai

No. 36, Nehru Street,
Old Mahabhalipuram Road,
Sholinganallur, Chennai-600 119, India
Tel: +91 44 66501544/45
Mobile: +91 9884775774, 9381381414

Delhi

Unit A1 & B1, 3rd Floor, TDI Centre
Plot No. 7, Jasola, New Delhi-110025
Tel: +91 11 45851800
Mobile: +91 9310003714, 9582250517,
9711789514

Bangalore

4th Floor, Prestige Atrium, Central Street
Bangalore 560001, India
Tel: +91 80 49012200
Mobile: +91 7290030399, 9742252517

Kolkata

Matrix Tower, DN-24, 2nd Floor
Room no. 203, Sector - V,
Salt Lake City, Kolkata-700091
Tel: +91 33 40040991/92/93
Mobile: +91 9051809099

Pune

145, Off. Mumbai - Pune Road
Pimpri, Pune-411018
Tel: +91 29 30611886,
Mobile: +91 9326506988, 9028970800

Vadodara

Mobile: +91 7290009954

Coimbatore

Mobile: +91 9381381414,
9344893165

Hyderabad

Tel: +91 40 40189601
Mobile: +91 7290031227

Ahmedabad

Mobile: +91 9377464065

Chandigarh

Mobile: +91 9501177119

Indore

Mobile: +91 9977236899,
7580942940

* Product information & specification are subject to change due to continuous product evolution. For latest information please contact Eaton sales office.